



Patented Beltless Smart Curtain System
新一代无皮带智能窗帘机



Hangzhou ADD Window Energy Saving Technology Co., Ltd.
杭州无尽之窗节能科技有限公司
Building 2#, 5th floor, NO.650 of yunxi road, yuhang district, Hangzhou, Zhejiang.
地址:浙江省杭州市余杭区仓前街道运溪路650号2幢506室

+86 571 8865 1857
info@addwj.com
www.addwj.com



Hangzhou ADD Window Energy Saving Technology Co., Ltd.
杭州无尽之窗节能科技有限公司

賜予我力量，
去改變我所能改變的；
賜予我勇气，
去接受我不能改變的；
賜予我智慧，
去分辨這兩者。

Grant me the power to change what I can;
Give me the courage to accept what I cannot change;
And the wisdom to know the difference.

CONTENTS



目录

企业简介

Company introduction **03**

产品全球认证

Product certificates **06**

全球专利认证

International patent **07**

企业资质认证

Quality certification **08**

全球销售体系

International sales **10**

智能遮阳解决方案

Smart sunshade solutions **11**

无线控制方案

Wireless Control Solutions **13**

有线控制方案

Wired Control Solution **14**

别墅解决方案

Villa solution **15**

住宅解决方案

Residence solution **17**

酒店解决方案

Hotel solution **19**

办公室解决方案

Office solution **21**

智能窗帘机

Smart curtain system **23**

智能窗帘机套装

Motorized curtain kit **25**

无电源方案

No AC power supply solutions **57**

伸缩智能窗帘机

Extendable Smart Curtain System **63**

智能管状电机

Smart tubular motor **69**

智能卷帘电机

Roller blind motor **70**

智能防风卷帘电机

Zip screen motor **83**

智能卷窗电机

Roller shutter motor **89**

智能阳蓬电机

Awning motor **98**

遥控器

Remote controller **101**

HUNTER101

HUNTER101 **103**

HUNTER201

HUNTER201 **105**

企业简介 /Company introduction

杭州无尽之窗节能科技有限公司坐落于杭州未来科技城，是一家专业研发、设计、生产、销售智能遮阳驱动电机及控制系统的创新型科技企业。公司团队具有18年遮阳驱动产品研发及运营经验，关注市场痛点，专注用户需求，推动行业变革。

无尽之窗主营智能窗帘机、智能卷帘等遮阳驱动产品，被广泛应用于家庭、办公、酒店等空间环境。产品可通过Matter、WiFi、ZigBee、蓝牙、485总线、KNX等各类无线、有线智能模块对接，实现与智能家居系统的联动，从而实现手机APP控制、语音控制、情景模式联动。

公司拥有多项发明专利、实用新型专利、外观专利等。公司全面推行ISO9001质量管理体系，产品通过了CCC、CE、UKCA、FCC、ROHS等多项认证。

Hangzhou ADD Window Energy Saving Technology Co., Ltd. is located in Hangzhou, China, which is an innovative technology enterprise specializing in the R&D, design, production, and sales of intelligent sun-shading control systems.

The company team has 16-year experience in the development and production of motorized sunshade products, focusing on market pain points, customers requirements, and doing our best to promote industry innovation. The company specializes in smart curtain systems, motorized roller blinds, and other motorized sunshade products, which are widely used in offices, homes and hotels... There are different control solutions for the products—RF, wiring or wireless... Matter, WiFi, Zigbee, Bluetooth, 485 bus, KNX, etc. Also the product control compatible with multiple smart home platforms or systems—mobile APP control, voice control, and smart home scenarios (switches) .

The company owns invention patents, utility model patents, appearance patents, etc. The company fully implements the ISO9001 quality management system, and its products obtained many international certificates, such as CCC, CE, UKCA, FCC, ROHS, etc.

公司理念 /Company philosophy

深刻认识产品应用和革新，了解产品的痛点，客户及市场的需求，将想法付诸于实践，研发制造出颠覆传统模式的智能电动遮阳产品。自无尽之窗成立的第一天起，就定义了我们的使命——无尽创新，让更多家庭享受智能美好生活。

We have a deep understanding of product innovation and application, the pain points of the product, as well as the needs of customers and the market. We put creative ideas into practice and produce some kinds of intelligent sunshading products that overturn traditional models. Since the first day of company's establishment, we have defined our mission -Endless innovation, just to make smart and beautiful life within the reach of every family.

Culture



企业文化



Our vision
我们的愿景

smart home Leaders
成为消费者心中
智能窗帘第一品牌



Our mission
我们的使命

Make home more welcoming
管理光线
创新科技 共享生活

Our values 我们的价值观



Customer first
客户至上

Diligence & hardworking
奋斗为本



Innovation & efficiency
创新高效

Upright & altruistic
正我利他



Keep improving
精益求精

Quality Keep Improving

品质精益求精

产品全球认证 Product certificates


∞



RoHS



全球专利认证 International patent

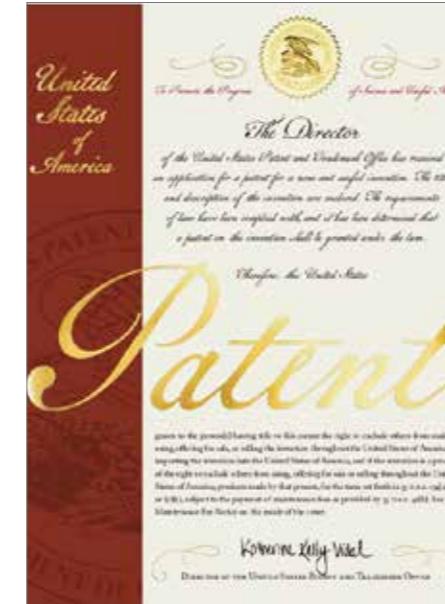

企业资质认证 Quality certification



无尽之窗 5年品质保证

5 - year Warranty



无尽之窗出产的每一台电机，都确保经过严格检测，出厂100%全检，从材料质量到功能运行，每一个环节，严把质量关。无尽智能窗帘机产品，先后获得欧盟CE认证，英国UKCA认证，美国FCC认证，澳洲RCM认证等。电机五年质保，无需繁琐证明，直接换新，让你免去后顾之忧。

无尽之窗节能科技有限公司，先后获得ISO9001Z质量管理体系认证，ISO45001职业健康安全管理体系认证，ISO14001环境管理体系认证。

始于无尽，永无止境。无尽之窗团队一直走在创新和负责的道路上，我们带给您的不仅是出众的产品，更是美好智慧生活的体验。

Every motor from ADD factory is guaranteed to be tested strictly, and 100% inspection before delivery. From material quality to functional operation, every step is strictly controlled. ADD smart curtain motor have obtained multiple international certifications: CE, UKCA, FCC, RCM ... We provide our customer with 5-year motor warranty from the product being delivered day on, defective motors can be replaced directly without many complicated evidences.

ADD Energy Saving Technology Co., Ltd. also has successively obtained ISO9001 Quality Management System Certification, ISO45001 Occupational Health and Safety Management System Certification, and ISO14001 Environmental Management System Certification.

Begin from ADD, go with endless. ADD team has always been on the path of innovation and responsibility. What we bring to you is not only high-quality products, but also a wonderful experience of high-level smart life.

全球销售体系 International sales



无尽之窗智能遮阳产品，以其出色的结构设计，出众的选材品质，省心的售后服务，在行业内独树一帜，广受消费者好评。产品远销欧洲、东南亚、美洲、澳洲等国家。我们坚信，成绩是过去的，未来的每一天都需要我们全力以赴。

The ADD Window smart shading product, with its excellent structural design, patent operating mechanism, outstanding material quality, and worry free after-sales service, stands out in the industry and is widely praised by consumers. Products are exported to countries such as Europe, Southeast Asia, the Americas, and Australia. We firmly believe that achievements are in the past, and every day in the future requires us to do our best.



Service processization
服务流程化



Service quantification
服务体量化



Service standardization
服务标准化



Service Informatization
服务信息化

CONTENT NO.2

Smart sunshade solutions



智能遮阳解决方案

立足客户，坚持创新，解决痛点，回馈市场。专于品，精于质，无尽之窗智能电机系列，满足酒店，别墅，公寓，办公等不同场景的产品需求，总有适合您的智能解决方案。

Based on customers, insist on innovation, solve product pain points, give back to the market. Specializing in product and quality, the ADD Window smart motors meet the needs of different scenarios such as hotels, villas, apartments, and offices. There is always a smart solution suitable for you.



无线控制方案 Wireless Control Solutions



无尽之窗智能电机，配合不同智能模组，实现多种无线控制方式，Matter (Thread)、涂鸦Wi-Fi、Zigbee、Z-wave等，实现智能手机APP控制，智能音箱控制等。

The ADD Window smart motor, combined with different intelligent modules, such as Matter, TUYA WiFi, Zigbee, Z-wave, etc., achieving mobile APP control, smart speaker control, etc.

有线控制方案 Wired Control Solutions



无尽之窗智能电机，可接入不同总线控制方案，如RS45总线控制方案，KNX协议控制方案，弱电控制方案，强电控制方案等，实现不同协议下的总线联控，整屋智能场景控制。

The ADD Window smart motor can be connected to different bus control schemes, such as RS45 bus protocol, KNX control protocol, low voltage control, AC power control etc., to achieve bus linkage control in smart home system and scene control.

别墅解决方案 Villa solution



别墅作为独栋建筑，需求高品质智能化全屋控制方案：

智能灯光，智能遮阳，智能安防系统等。功能多样的智能窗帘系统，满足不同控制方式的需求，总有一款适合你的全屋智能方案。

As a luxury building, villas require high-quality complete intelligent control solutions such as :

smart lighting, smart curtain, smart security systems. A versatile smart sun shading system that meets the needs of different control methods, there is always a solution suitable for your whole house smart plan.



Villas 别墅区域	Solution 遮阳解决方案	Motor type 电机选型	Motor series 电机系列
Outdoor sun-shading 户外遮阳	Zip Screen 防风卷帘	Smart tubular motor 智能管状电机	Shaman series Φ45 萨满系列Φ45mm

Villas 别墅区域	Solution 遮阳解决方案	Motor type 电机选型	Motor series 电机系列
Outdoor sun-shading 户外遮阳	Roller shutter 卷帘窗	Smart tubular motor 智能管状电机	Shaman series Φ45 萨满系列Φ45mm

住宅解决方案 Residence solution



在住宅场景中，智能窗帘主要应用在客厅及卧室，生活化的智能开合帘，必须要实现客户享受生活的需求，安静，轻松，安装简易，无售后.....

In the residence, living intelligence on balconies and bedrooms has become a popular trend."Must" meet the customer's enjoying life needs—High quality, running quiet, easy to install, and worry free...



Residences 住宅区域	Solution 遮阳解决方案	Motor type 电机选型	Motor series 电机系列
Balcony 阳台	Zip Screen 防风卷帘	Smart tubular motor 智能管状电机	Shaman series Φ45 萨满系列Φ45mm

Residences 住宅区域	Solution 遮阳解决方案	Motor type 电机选型	Motor series 电机系列
Living room 客厅	Smart curtain system 窗帘	Smart curtain motor 智能窗帘机	Mage series 魔法师系列窗帘机

酒店解决方案 Hotel solution



如今越来越多的酒店都配置了电动窗帘，插卡取电，窗帘自动开启，配备智能控制面板或接线开关，在床头就能关闭窗帘，安享静谧之夜

Smart hotel is more and more popular now. the curtain opens automatically while you are inserting the card ,control the opening and closing of curtains on the bed through smart panels or switches,you can have your enjoyable days peacefully.



Hotels 酒店区域	Solution 遮阳解决方案	Motor type 电机型	Motor series 电机系列
Bedroom 卧室	Smart curtain system 窗帘	Smart curtain motor 智能窗帘机	Mage 10B series 魔法师系列窗帘机


Hotels 酒店区域	Solution 遮阳解决方案	Motor type 电机型	Motor series 电机系列
Bathroom 洗浴室	Roller blind 卷帘	Smart tubular motor 智能管状电机	Shaman series Φ25/35 萨满系列Φ25mm/35mm

办公室解决方案 Office solution



开阔明朗的办公室，是我们无数人奋斗的战场。脚下有你拼搏的印记，眼中有你未来的蓝图。升起卷帘，让清晨的阳光与和风，为你开启美好的一天，冲一杯醒神的咖啡，或者泡一杯升腾热气的茶，脑中思索着这一天的工作内容，要相信每一天都充满无尽希望，让智能卷帘静静地陪伴你，朝朝暮暮，日出日落.....

Raise the rolling blinds, let the morning sunshine and gentle breeze start a beautiful day for you, make a refreshing cup of coffee or steaming tea, and think about the work of the day. Believe that every day is filled with endless hope, let smart roller blind you, day and night, sunrise and sunset...

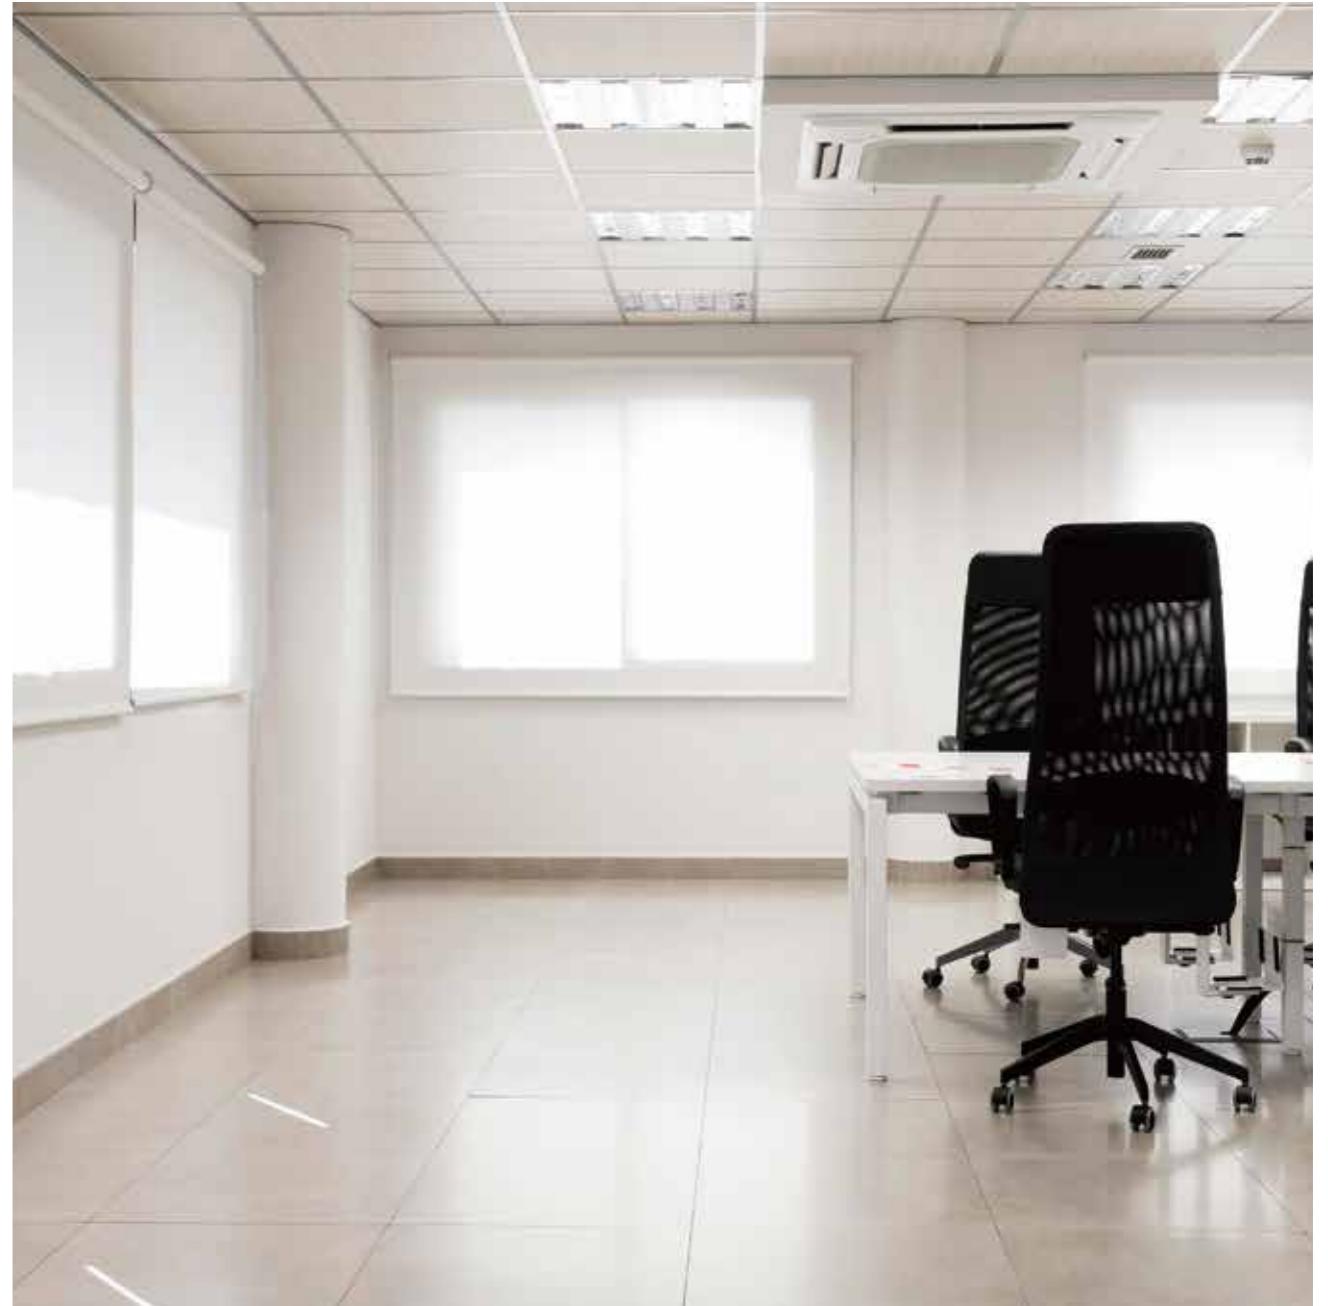

Offices area 办公室区域	Solution 遮阳解决方案	Motor type 电机选型	Motor series 电机系列
Meeting room 会议室	Zip Screen 防风卷帘	Smart tubular motor 智能管状电机	Shaman series Φ45 萨满系列Φ45mm

Offices area 办公室区域	Solution 遮阳解决方案	Motor type 电机选型	Motor series 电机系列
Offices 办公室	Roller blind 卷帘	Smart tubular motor 智能管状电机	Shaman series Φ25/35 萨满系列Φ25mm/35mm

CONTENT NO.3

Smart curtain system



智能窗帘机


为解决智能窗帘电动轨道运输不方便、组装复杂、售后困难等各类痛点，全新推出新一代无皮带智能窗帘机。

To solve various pain points on the market, such as inconvenient transportation, complicated assembly, and difficult after-sales of electric curtain rails, a patented beltless smart curtain kit is launched.



智能窗帘机爆炸图 The smart curtain exploded view

∞

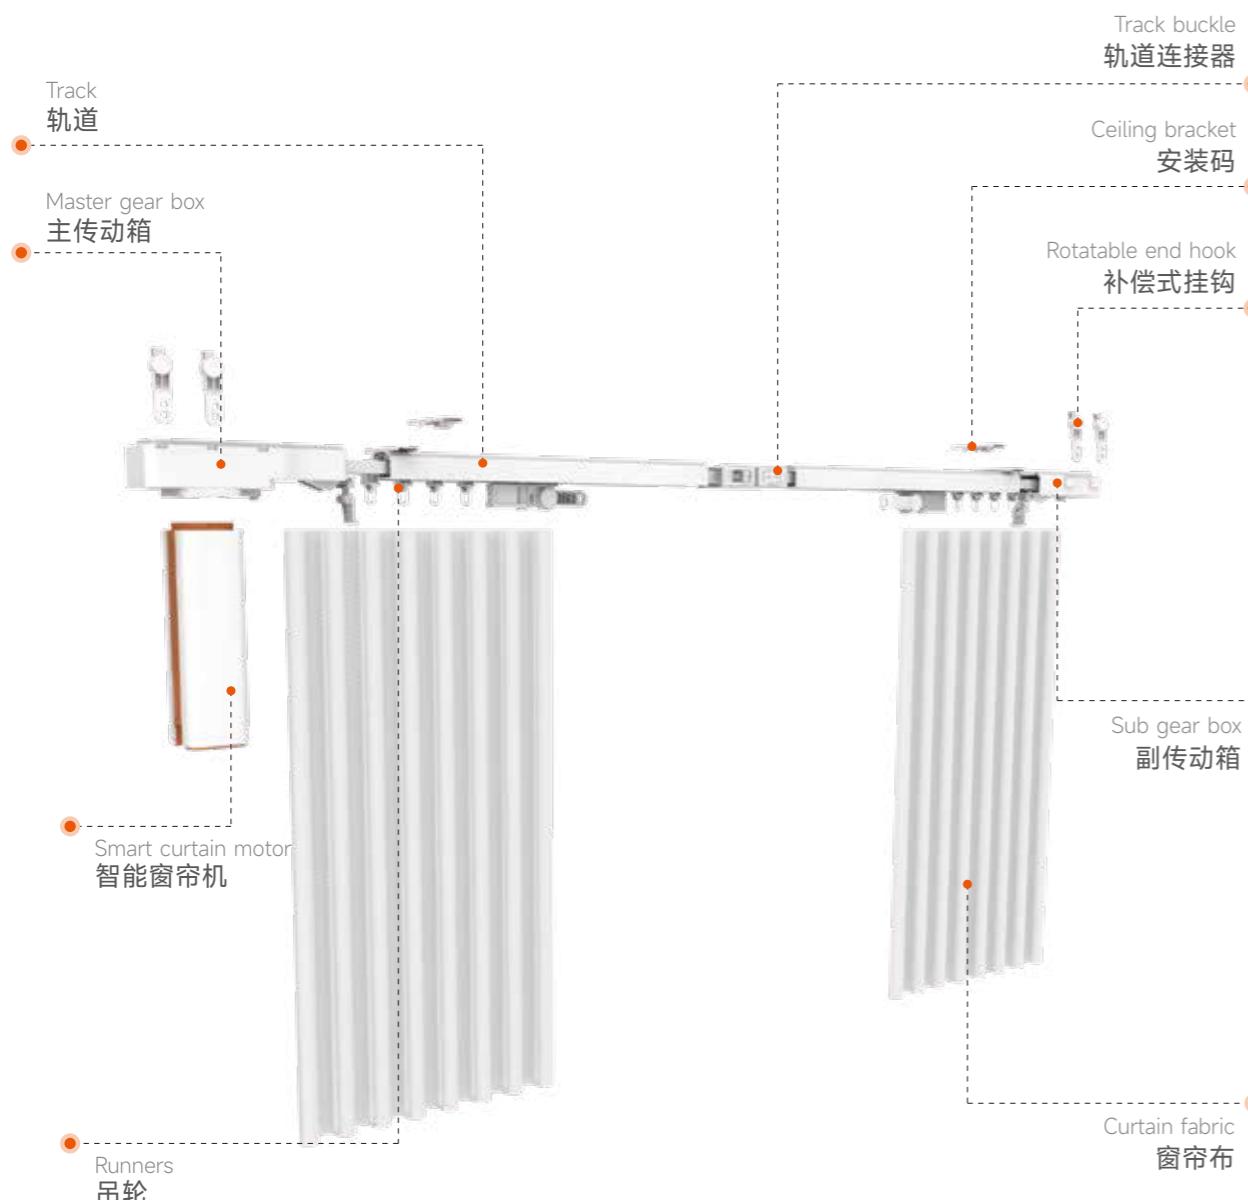

智能窗帘机套装展示 Motorized curtain kit display

∞



1M Master track
1米主轨道



Smart curtain motor
智能窗帘机电机



1M track
1M轨道



Remote control
发射器



1M adjustable track
50CM+2*20CM+10CM拼接轨道



Ceiling bracket
安装码



Rotatable end hook
补偿挂钩

套餐规格 kit models



MAGE10B-2



MAGE10B-3



MAGE10B-4



MAGE10B-5



MAGE10B-6



MAGE10B-7


Product parameter / 产品信息

Model No. 型号:	MAGE10B-2	Nominal voltage: 额定电压:	100-240V(50/60Hz)	Nominal consumption: 额定功率:	9W	IP index: 防护等级:	IP20	Working temperature: 工作温度:	-20°C~55°C	Max.load: 最大载重:	50KG
		Running speed: 运行速度:	8-36cm/s	Package weight: 套装重量:	3.7KG	Insulation Grade: 绝缘等级:	B	Package size: 套装尺寸:	1152*220*70MM	Suitable for: 适用尺寸:	1.0-2.1M
Model No. 型号:	MAGE10B-3	Nominal voltage: 额定电压:	100-240V(50/60Hz)	Nominal consumption: 额定功率:	9W	IP index: 防护等级:	IP20	Working temperature: 工作温度:	-20°C~55°C	Max.load: 最大载重:	50KG
		Running speed: 运行速度:	8-36cm/s	Package weight: 套装重量:	4.4KG	Insulation Grade: 绝缘等级:	B	Package size: 套装尺寸:	1152*220*70MM	Suitable for: 适用尺寸:	2.0-3.1M
Model No. 型号:	MAGE10B-4	Nominal voltage: 额定电压:	100-240V(50/60Hz)	Nominal consumption: 额定功率:	9W	IP index: 防护等级:	IP20	Working temperature: 工作温度:	-20°C~55°C	Max.load: 最大载重:	50KG
		Running speed: 运行速度:	8-36cm/s	Package weight: 套装重量:	5.1KG	Insulation Grade: 绝缘等级:	B	Package size: 套装尺寸:	1152*220*70MM	Suitable for: 适用尺寸:	3.0-4.1M
Model No. 型号:	MAGE10B-5	Nominal voltage: 额定电压:	100-240V(50/60Hz)	Nominal consumption: 额定功率:	9W	IP index: 防护等级:	IP20	Working temperature: 工作温度:	-20°C~55°C	Max.load: 最大载重:	50KG
		Running speed: 运行速度:	8-36cm/s	Package weight: 套装重量:	5.8KG	Insulation Grade: 绝缘等级:	B	Package size: 套装尺寸:	1152*220*70MM	Suitable for: 适用尺寸:	4.0-5.1M
Model No. 型号:	MAGE10B-6	Nominal voltage: 额定电压:	100-240V(50/60Hz)	Nominal consumption: 额定功率:	9W	IP index: 防护等级:	IP20	Working temperature: 工作温度:	-20°C~55°C	Max.load: 最大载重:	50KG
		Running speed: 运行速度:	8-36cm/s	Package weight: 套装重量:	6.5KG	Insulation Grade: 绝缘等级:	B	Package size: 套装尺寸:	1152*220*70MM	Suitable for: 适用尺寸:	5.0-6.1M
Model No. 型号:	MAGE10B-7	Nominal voltage: 额定电压:	100-240V(50/60Hz)	Nominal consumption: 额定功率:	9W	IP index: 防护等级:	IP20	Working temperature: 工作温度:	-20°C~55°C	Max.load: 最大载重:	50KG
		Running speed: 运行速度:	8-36cm/s	Package weight: 套装重量:	7.2KG	Insulation Grade: 绝缘等级:	B	Package size: 套装尺寸:	1152*220*70MM	Suitable for: 适用尺寸:	6.0-7.1M


12 Big upgrades Add innovation




12大升级 无尽创新

Beltless
running systemAssembly
without toolsEasy
start carrierBuilt-in
Lithium batteryRotatable
end hookAluminum
profile
thickness 2.2mm


内置锂电池




补偿式挂钩




2.2mm轨道厚度

Type-C
interfaceComplete
kitMagnetic
remote


Type-C接口




二合一套盒



遥控器磁吸

Large bearing
capacity3-level
running speedCustom
Opening&closing
position settings

高承重轨道



三档调速



开合随意定


无皮带传动 Beltless running system



创新无皮带传动系统，利用钢带传动，无延展，
不卡顿，不断裂，大大减少因皮带造成的系统故障。

Patent Beltless running system, running with steel tape, no extension, no jamming, no fracture, greatly reduce system failures caused by belt jamming.


无工具拼装 Assembly without tools

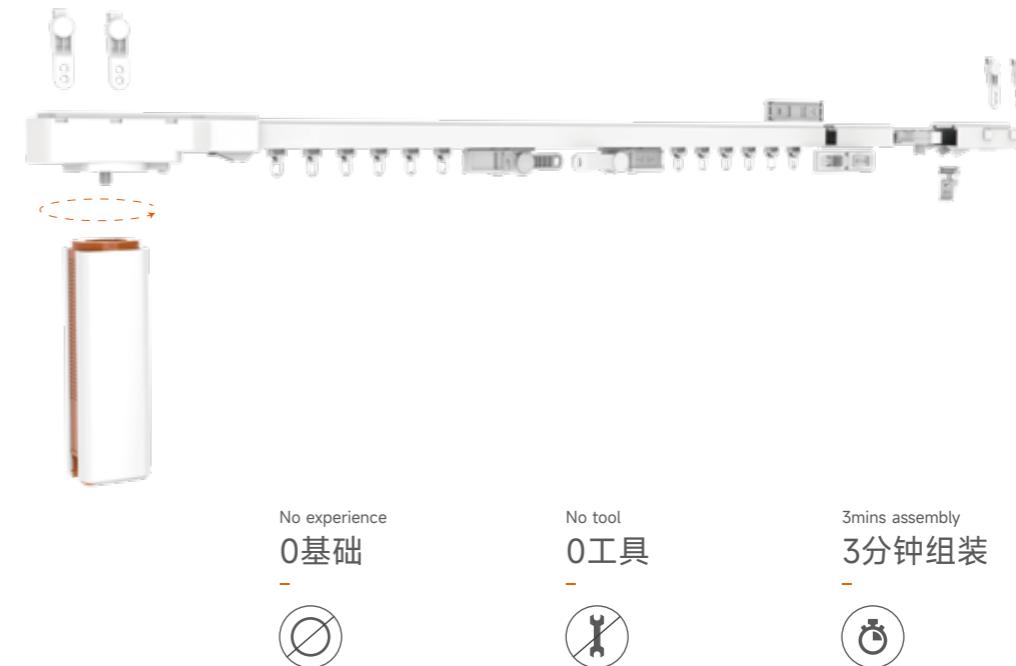

孩子都能装，主轨道组装已在工厂完成，其余拼接和组装超简易，超快速，0基础，0工具，3分钟完成组装。

Super easy assembly even for kids, master track has been finished in factory, the rest splicing and assembly is super easy and quick, without experience, without any tools, finish whole assembly in 3 minutes.

易手拉滑车 Easy start carrier

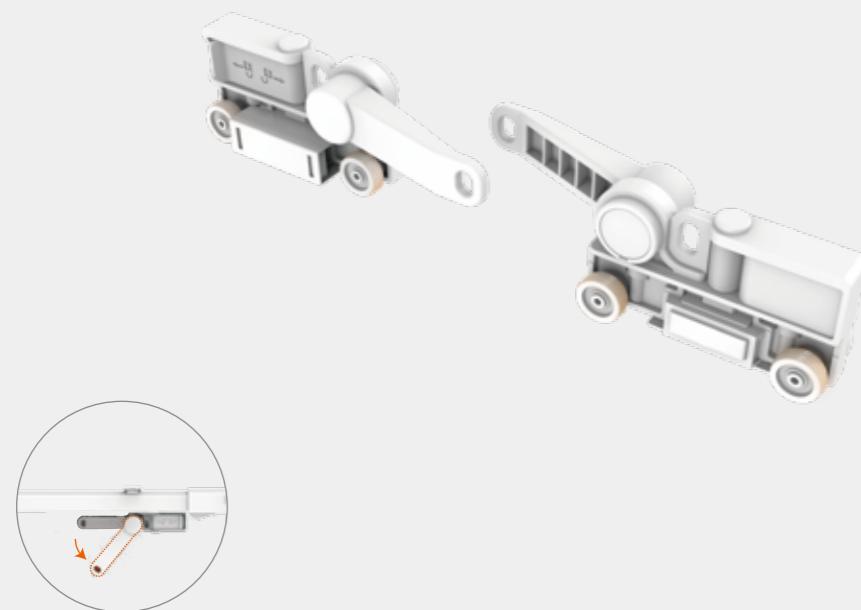

独特的滑车旋转臂设计，不论怎么拉窗帘，
一拉就走，轻触启动。

Special patent carrier design, rotatable carrier
arm, curtain runs with soft and light pull.

内置锂电池 Built-in lithium battery



内置锂电池，停电仍可遥控控制与手拉启动。

Battery capacity
电池容量


2500mAH

Usage days
使用时长

15Day

The curtain motor work with built-in battery. Remote control and manual start functions are still workable with sudden power failure.

补偿式挂钩 Rotatable end hook

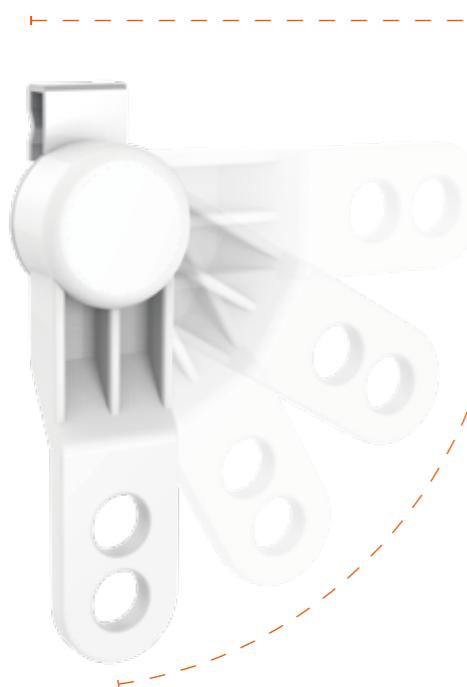

末端挂钩可旋转，精准调节轨道两端尺寸0-5公分。

The end hook is rotatable ,can adjustable 0-5cm accurately.

2.2mm轨道厚度 Aluminum profile thickness 2.2mm



优质铝合金型材轨道厚度2.2mm,不变形，
轨道表面采用高品质电泳工艺处理。

thickness
厚度
2.2MM

Aluminum profile thickness 2.2mm, no deformation, the surface of the track adopts electrophoresis technology to ensure its quiet and smooth running.



Type-C接口 Type-C interface ∞



Type-C接口充电，电机底部有Type-C接口，可接入5V电源供电，供电更加便利。

There is an additional Type-C interface on motor bottom, motor can be charged via 5v power supply, which makes great convenience to supply power for motor.

二合一套盒 Complete kit ∞



电机、轨道、遥控器、零部件全部在一个套装盒里。
DIY快速组装，一步到位。
多种规格，统一包装尺寸，运输无忧，仓储便捷。

The motor, track, remote control, and parts are all in one kit box. DIY can be quickly assembled in one step.
Various models in uniform packaging size, worry-free transportation and convenient storage.

遥控器磁吸 Magnetic remote



精巧遥控器，可手持，可贴墙。
Exquisite remote control, hand-held or wall mounting ,

高承重轨道 Large bearing capacity



无尽之窗	2M track 2米轨道	3M track 3米轨道	4M track 4米轨道	5M track 5米轨道	6M track 6米轨道	7M track 7米轨道
Loading capacity 承重	50 (KG)					


三档调速 3-level running speed



遥控器和APP可调节电机运行速度，静音档，正常档，快速档，满足不同场景需求。

The remote control and APP can adjust the motor running speed.Quiet, normal , fast, 3 speeds to meet the needs of different scenarios.


开合随意定 Custom opening&closing position settings

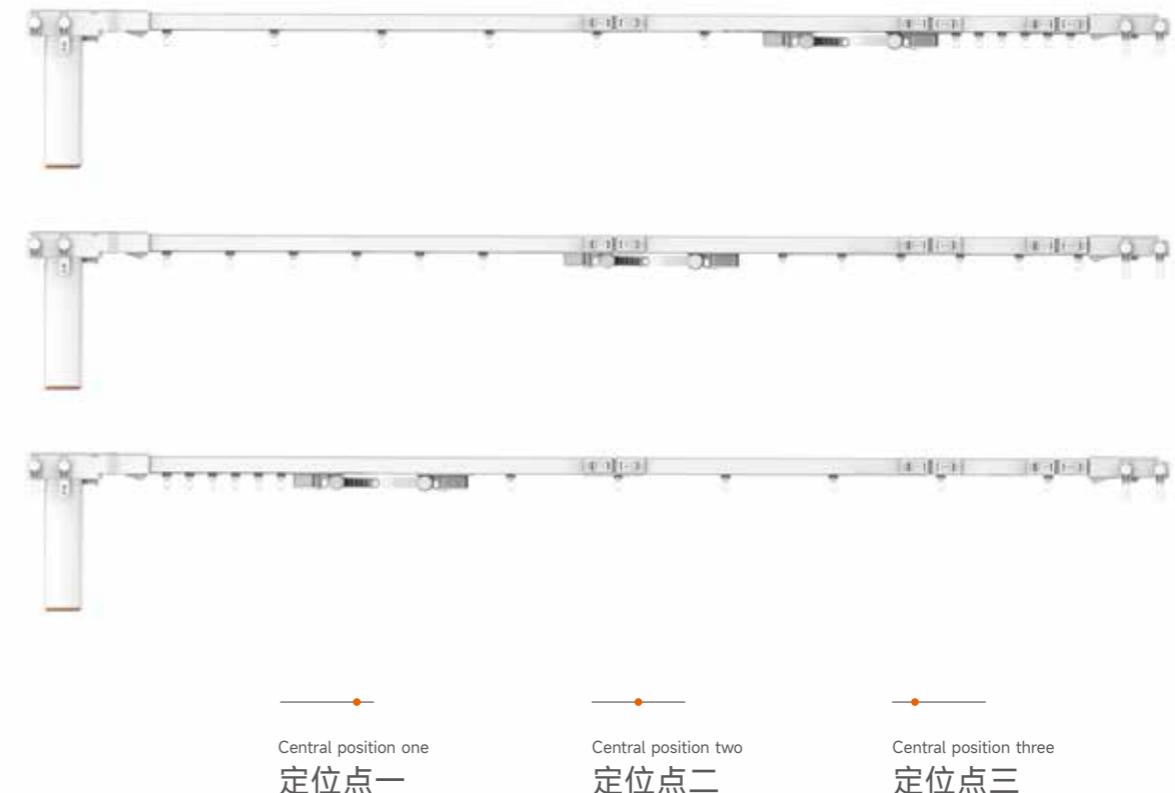

窗帘机的开合中心位置可以根据安装环境适当调节。比如，在窗户左侧有障碍物，窗帘不需要开到末端，客户通过改变滑车位置来重新定制开合的中心点位置，避开障碍物。

The central position of opening&closing can be adjusted according installation environment.For example, if there is an obstacle on the left side of the window and the curtain does not need to be opened to end, the customer can let curtain avoid obstacles by customizing the opening&closing central position via changing the master carrier's position.

智能控制方式 Intelligent control method

Front
正面展示

Smart communication protocol



智能通讯协议

matter zigbee




485 总线

4 芯线 强电控制

Smart ecology



智能生态

Back
背面展示

小爱同学



天猫精灵



华为小艺



tuya



易键联

Hello "ADD"
"你好，小满"

无尽之窗智能窗帘机



M A G E 1 0 B - M T

支持MATTER



Top

Bottom

顶部展示

底部展示



Smart control solution

智能控制方式



Mobile APP control



Voice control



Radio control



Scene Panel

手机 APP 控制

智能语音控制

无线遥控控制

场景面板控制

Product parameter / 产品信息

Motor type: 电机型号:	MAGE10B-MT	Rated torque: 额定扭矩:	0.15Nm	Nominal voltage: 额定电压:	110-240V(50/60Hz)	Nominal Consumption: 额定功率:	9W	Nominal speed: 额定转速:	600r/min	Radio frequency: 无线频率:	433.92MHz
Max.load: 最大载重:	50KG	Running speed: 运行速度:	8-36cm/s	Power cable: 电源线类型:	2Wires	Isolation level: 绝缘等级:	B	IP index: 防护等级	IP20		




无尽之窗智能窗帘机



M A G E 1 0 B - T Y W (Tuya WiFi)

M A G E 1 0 B - T Y Z (Tuya ZigBee)

支持涂鸦TUYA

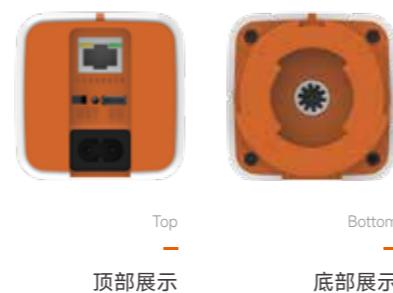

Smart control solution

智能控制方式



Product parameter / 产品信息

Motor type: 电机型号:	MAGE10B-TYW MAGE10B-TYZ	Rated torque: 额定扭矩:	0.15Nm	Nominal voltage: 额定电压:	110-240V(50/60Hz)	Nominal Consumption: 额定功率:	9W	Nominal speed: 额定转速:	600r/min	Radio frequency: 无线频率:	433.92MHz
Max.load: 最大载重:	50KG	Running speed: 运行速度:	8-36cm/s	Power cable: 电源线类型:	2Wires	Isolation level: 绝缘等级:	B	IP index: 防护等级:	IP20		



无尽之窗智能窗帘机



M A G E 1 0 B - H M W


支持鸿蒙智联Works with HarmonyOS Connect

支持HUAWEI HiLink



Smart control solution

智能控制方式

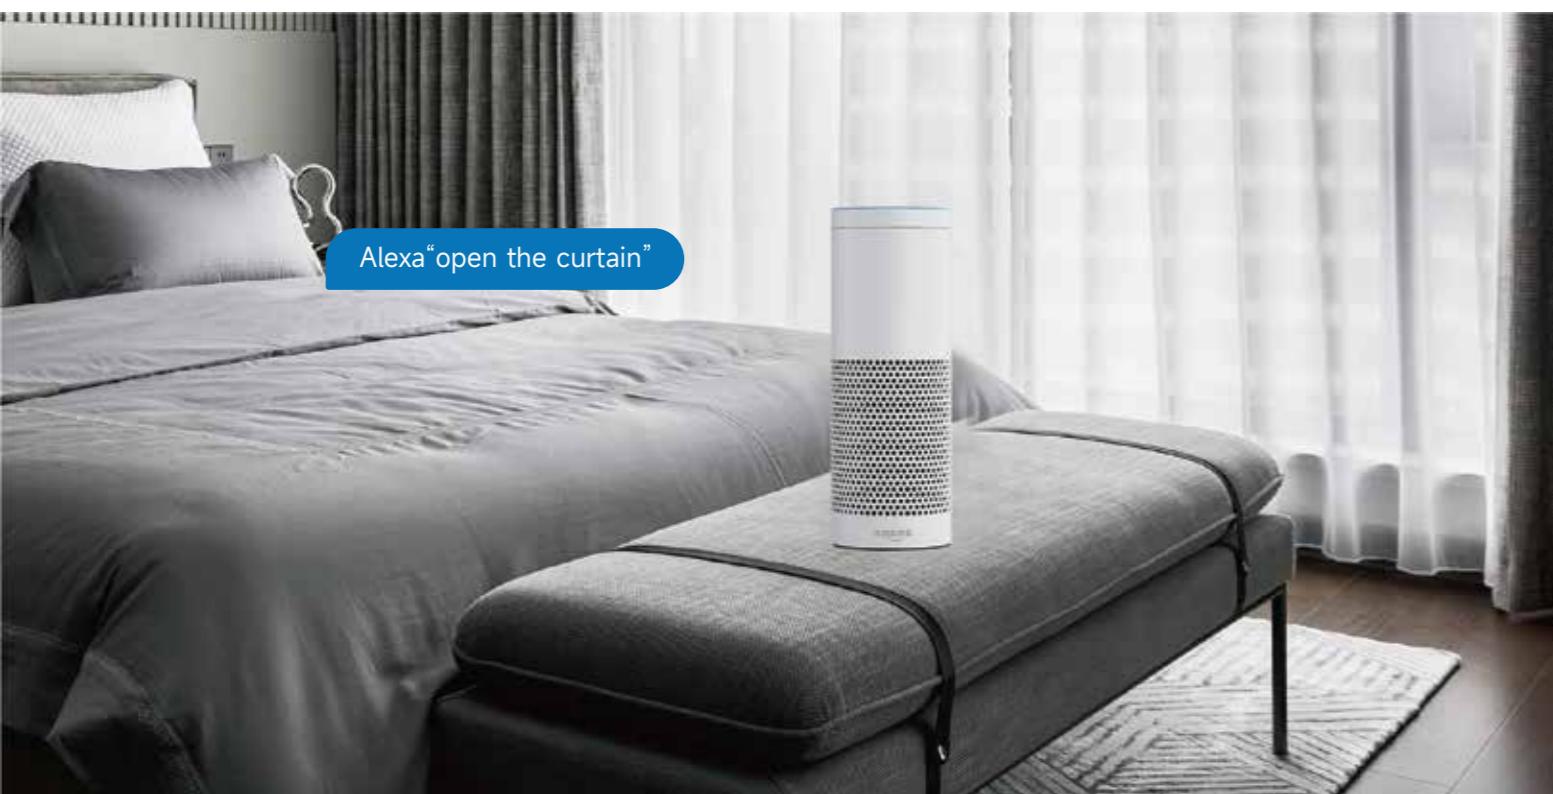

Product parameter / 产品信息

Motor type: 电机型号:	MAGE10B-HMW	Rated torque: 额定扭矩:	0.15Nm	Nominal voltage: 额定电压:	110-240V(50/60Hz)	Nominal Consumption: 额定功率:	9W	Nominal speed: 额定转速:	600r/min	Radio frequency: 无线频率:	433.92MHz
Max.load: 最大载重:	50KG	Running speed: 运行速度:	8-36cm/s	Power cable: 电源线类型:	2Wires	Isolation level: 绝缘等级:	B	IP index: 防护等级:	IP20		




无尽之窗智能窗帘机



M A G E 1 0 B - X M B (mi Bluetooth)

M A G E 1 0 B - X M W (mi WiFi)

支持小米米家

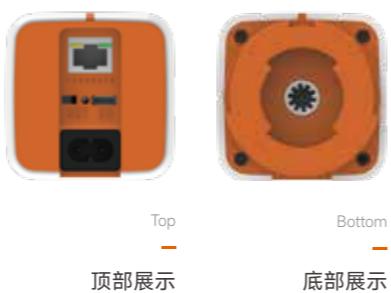

Smart control solution

智能控制方式



Product parameter / 产品信息



Motor type: MAGE10B-XMB Rated torque: 0.15Nm Nominal voltage: 110-240V(50/60Hz) Nominal Consumption: 9W Nominal speed: 600r/min Radio frequency: 433.92MHz

电机型号：MAGE10B-XMB 额定扭矩：0.15Nm 额定电压：110-240V(50/60Hz) 额定功率：9W 额定转速：600r/min 无线频率：433.92MHz


Max.load:
最大载重：
50KG

Running speed:
运行速度：
8-36cm/s

Power cable:
电源线类型：
2Wires

Isolation level:
绝缘等级：
B

IP index:
防护等级
IP20

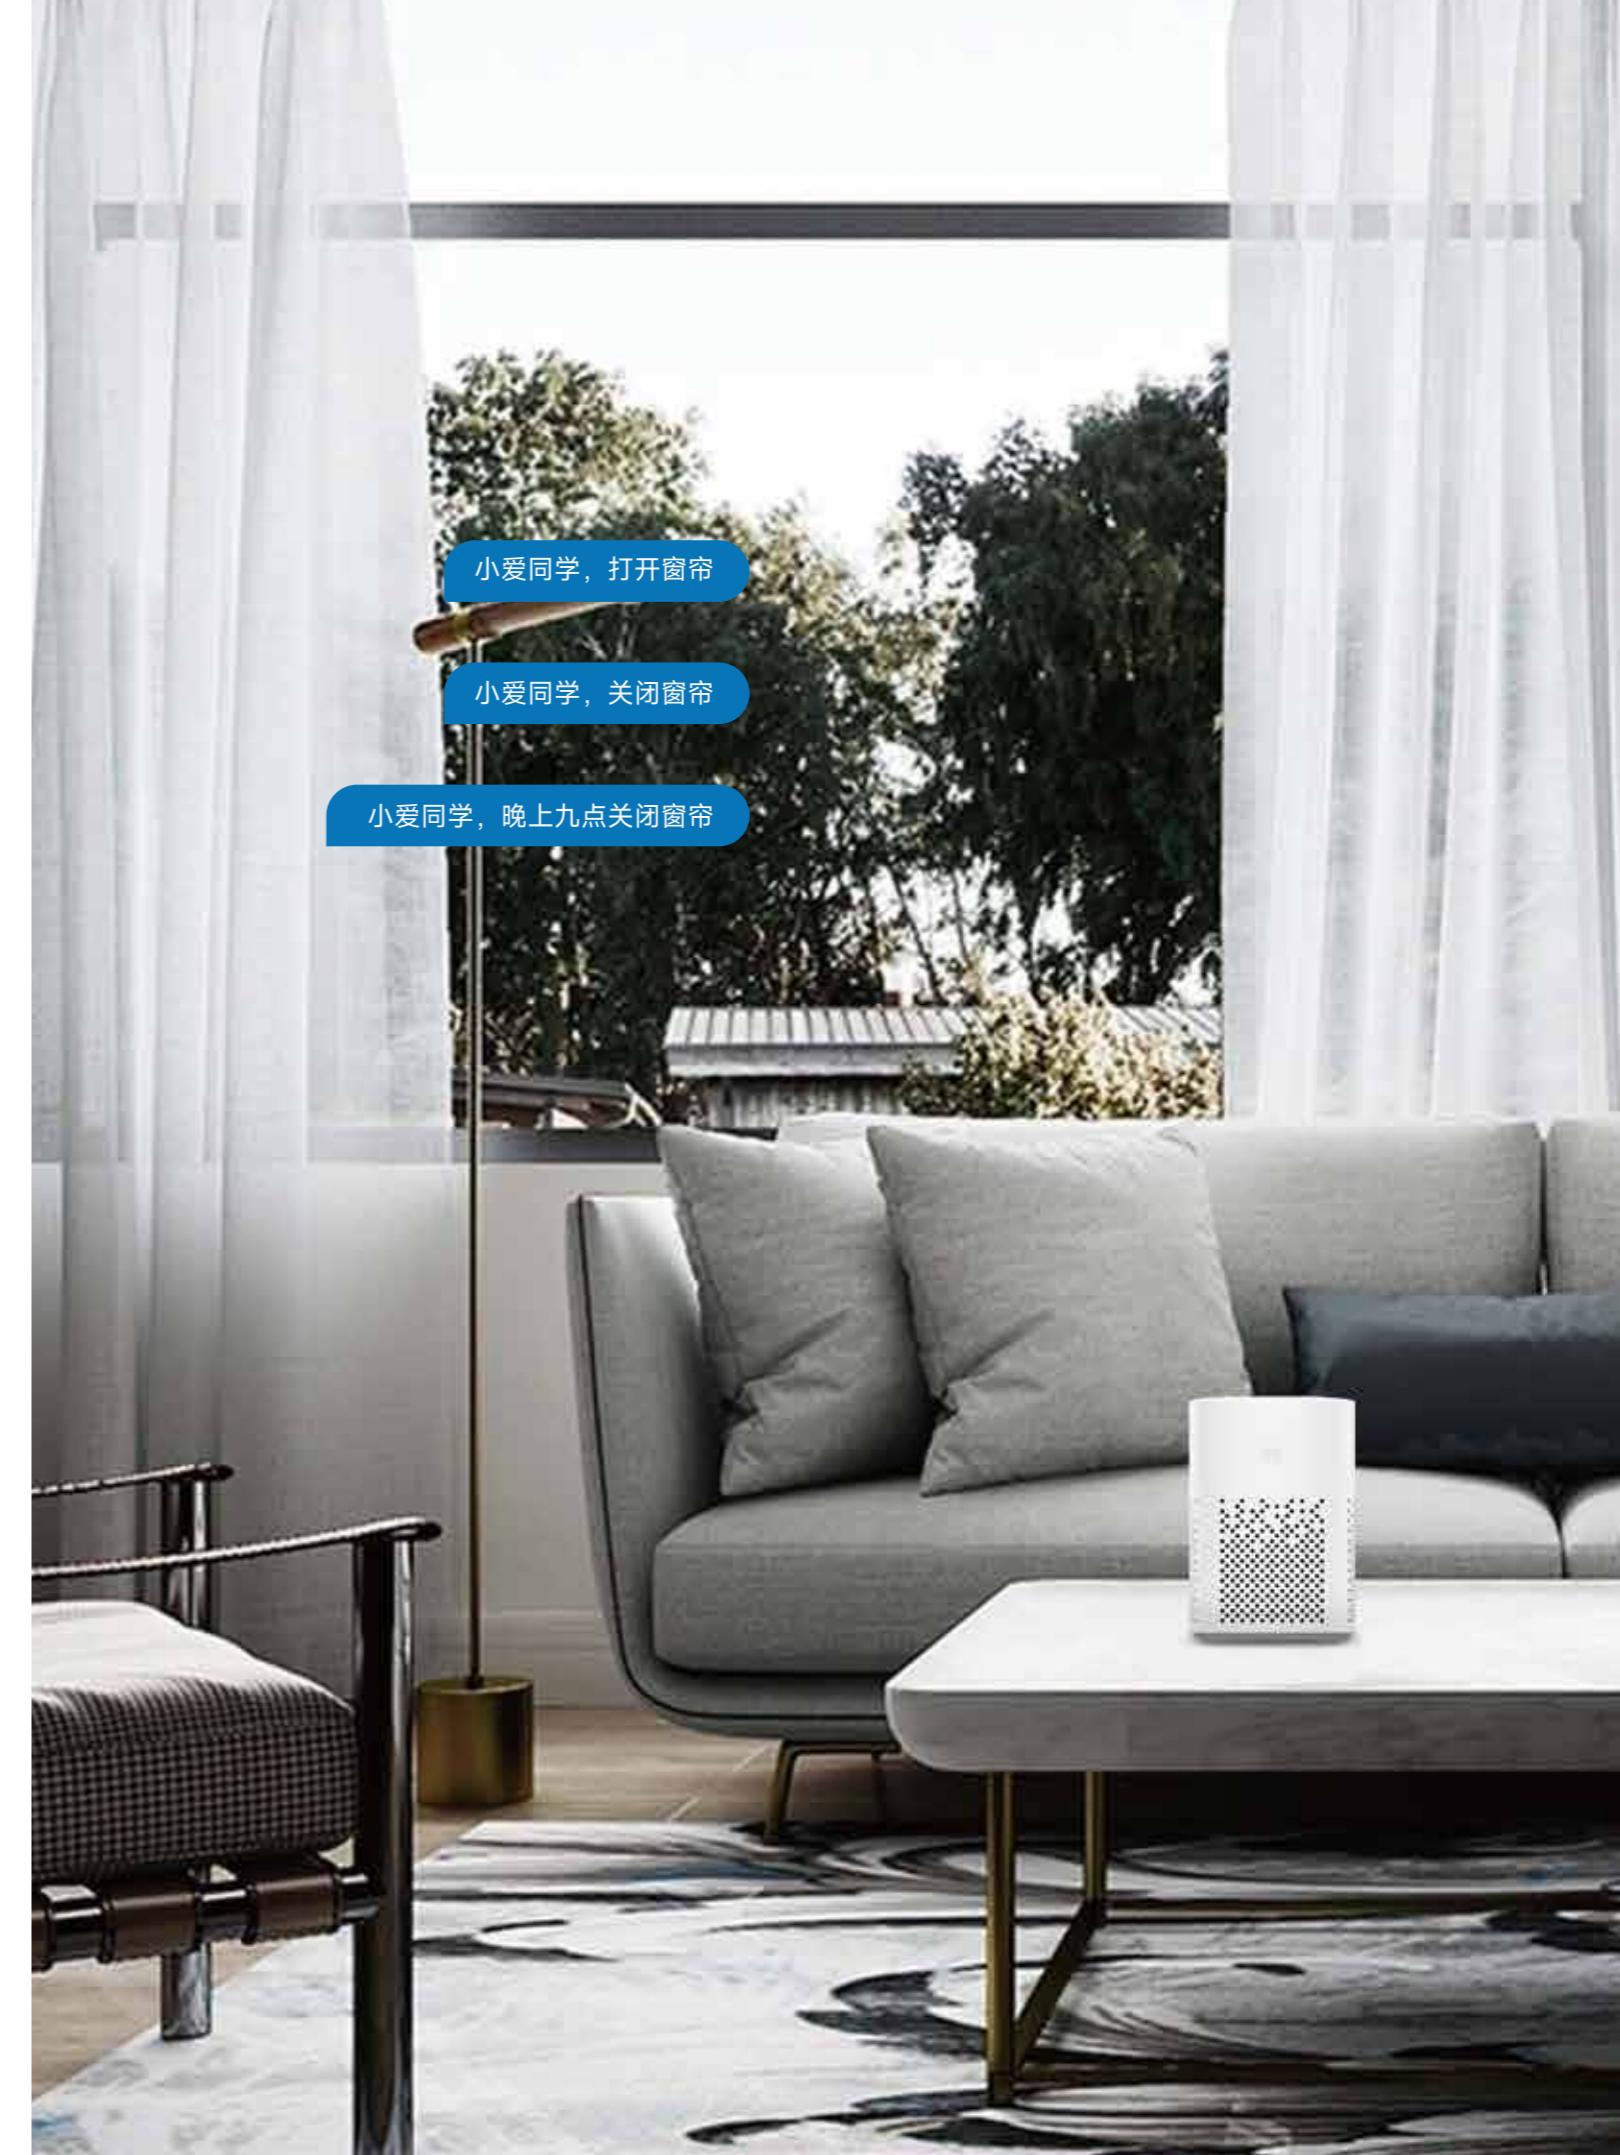

无尽之窗智能窗帘机



M A G E 1 0 B - T M W

支持天猫精灵



Top
顶部展示
Bottom
底部展示

天猫精灵，打开窗帘

天猫精灵，关闭窗帘

天猫精灵，晚上九点关闭窗帘



Smart control solution

智能控制方式




Mobile APP control
手机APP控制
Voice control
智能语音控制
Radio control
无线遥控控制
Scene Panel
场景面板控制



Product parameter / 产品信息



Motor type: 电机型号:	MAGE10B-TMW	Rated torque: 额定扭矩:	0.15Nm	Nominal voltage: 额定电压:	110-240V(50/60Hz)	Nominal Consumption: 额定功率:	9W	Nominal speed: 额定转速:	600r/min	Radio frequency: 无线频率:	433.92MHz
Max.load: 最大载重:	50KG	Running speed: 运行速度:	8-36cm/s	Power cable: 电源线类型:	2Wires	Isolation level: 绝缘等级:	B	IP index: 防护等级	IP20		

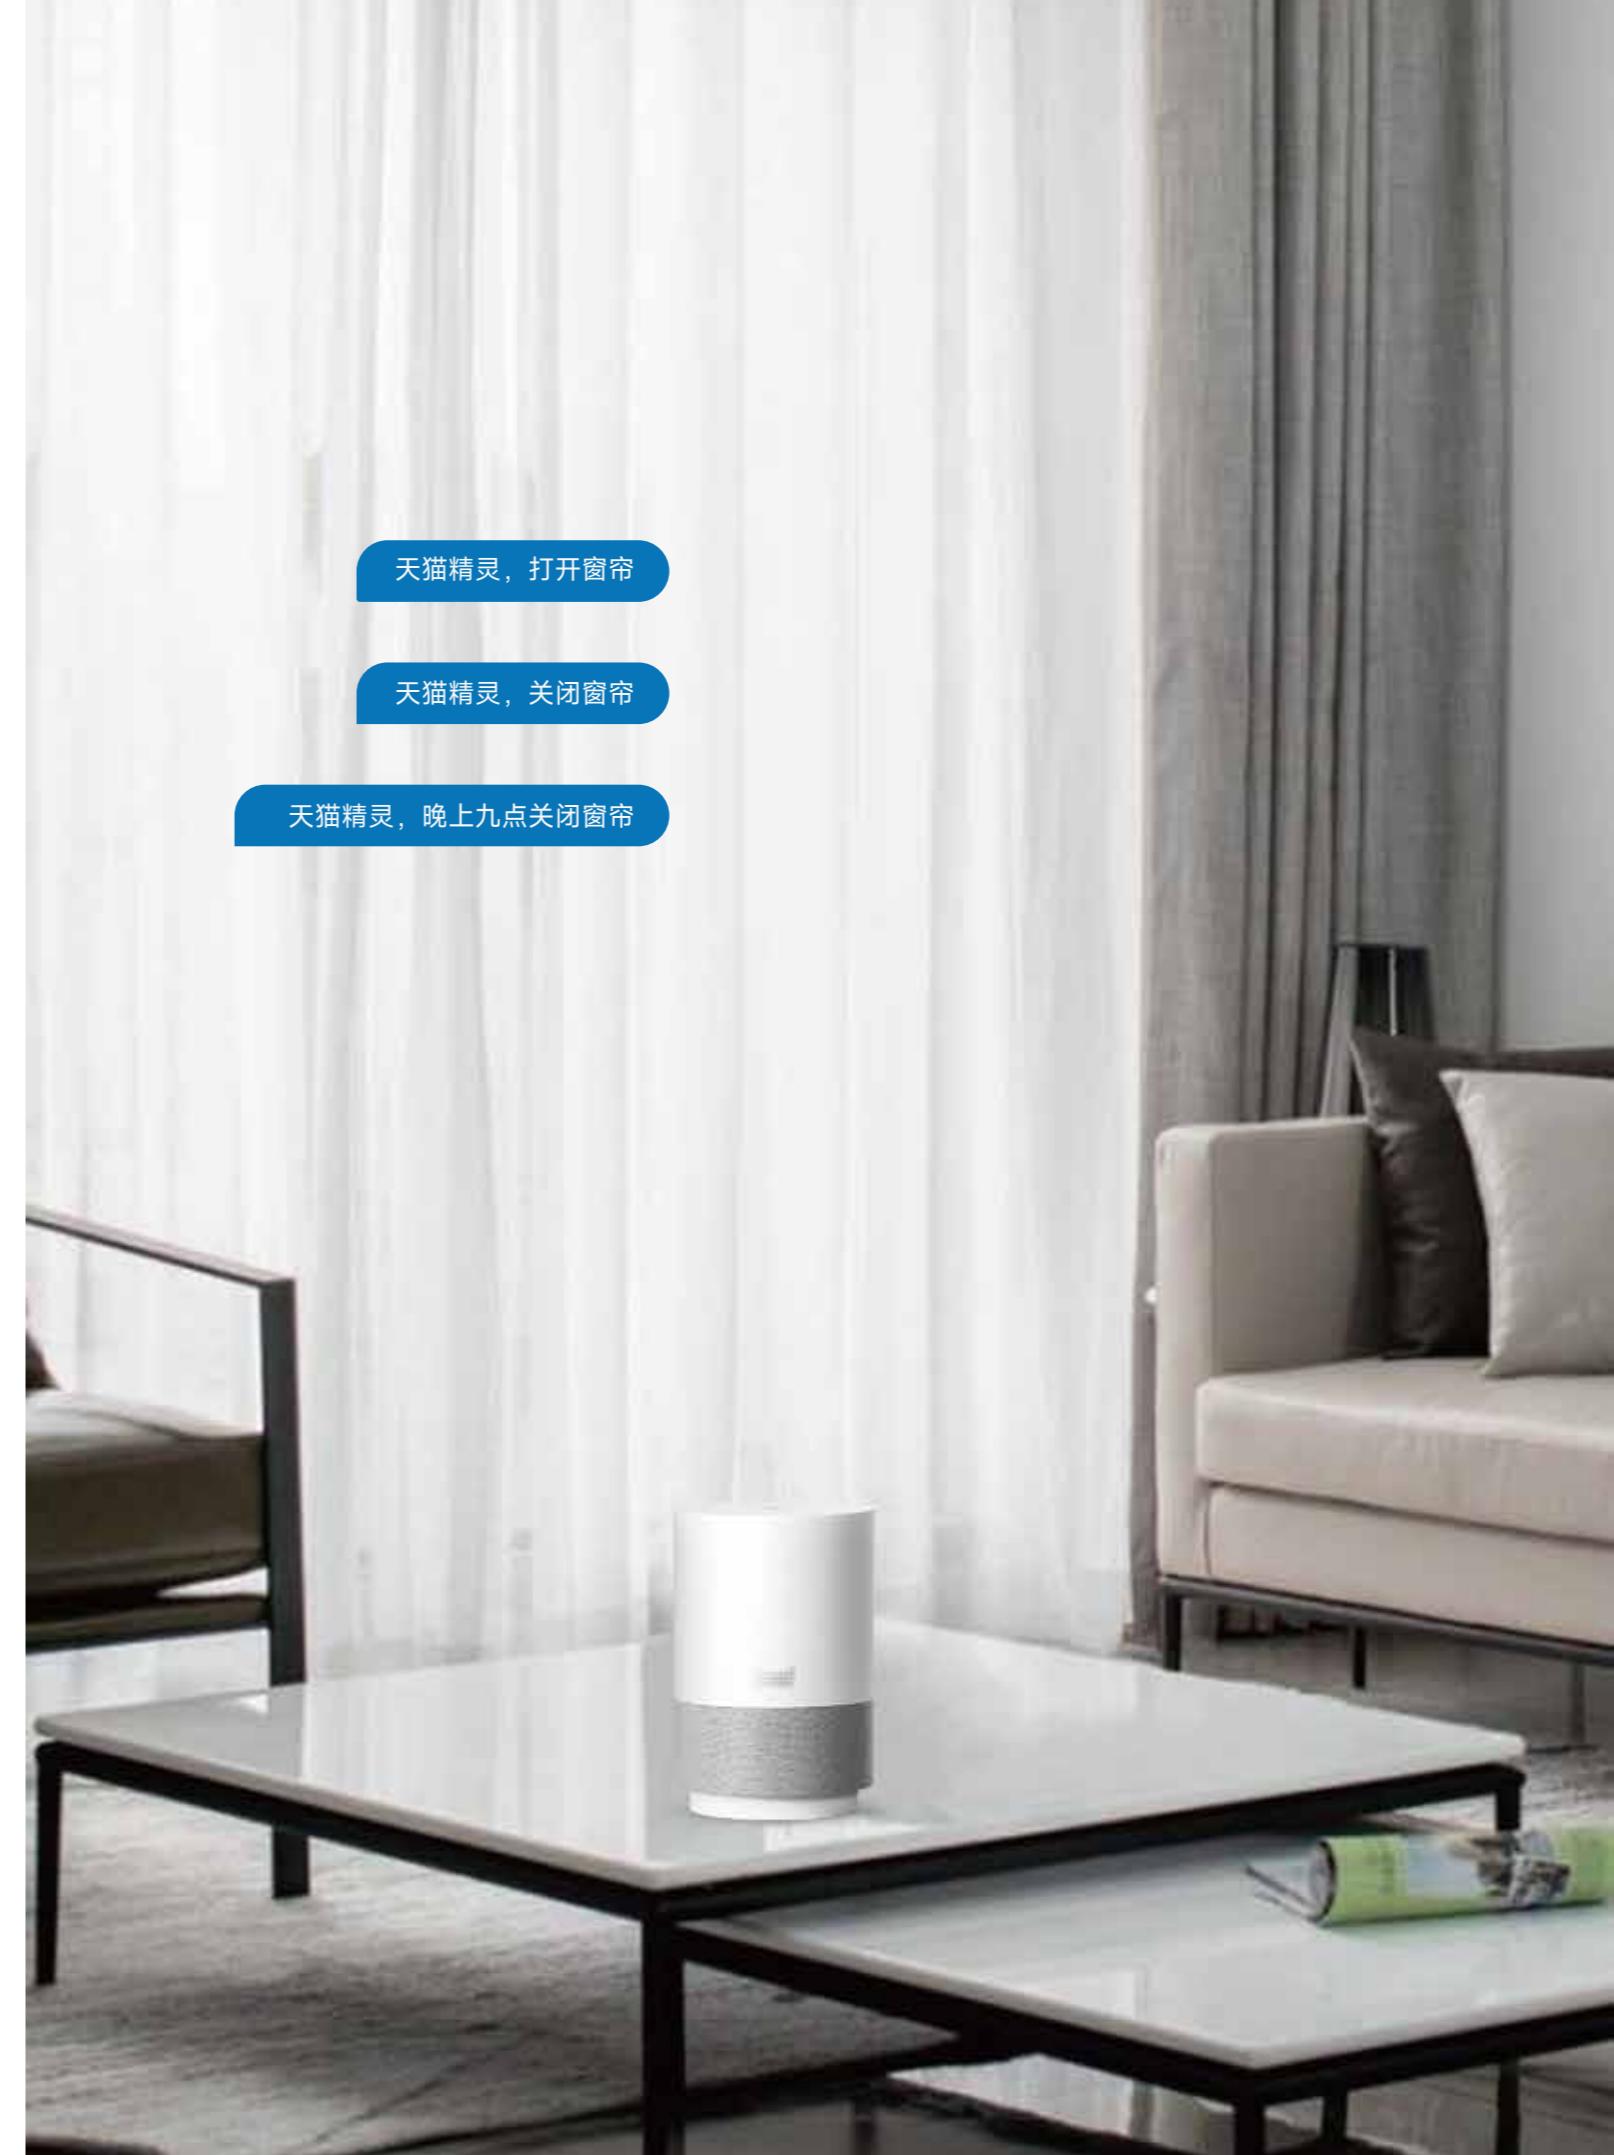

无尽之窗智能窗帘机



M A G E 1 0 B - L X Y

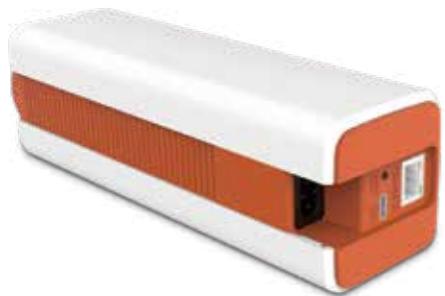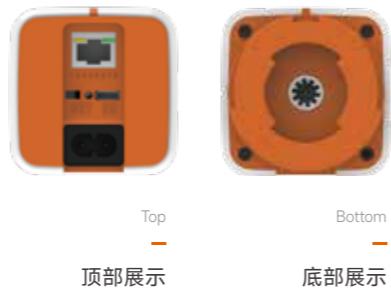离线语音 ADD[®]

Smart control solution

智能控制方式



Product parameter / 产品信息

Motor type:	MAGE10B-LXY	Rated torque:	0.15Nm	Nominal voltage:	110-240V(50/60Hz)	Nominal Consumption:	9W	Nominal speed:	600r/min	Radio frequency:	433.92MHz
Max.load:	最大载重: 50KG	Running speed:	8-36cm/s	Power cable:	电源线类型: 2Wires	Isolation level:	B	IP index:	防护等级 IP20		


离线语音
Hello "ADD"
"你好，小满"
ADD[®]



无尽之窗智能窗帘机



M A G E 1 0 B - K N X

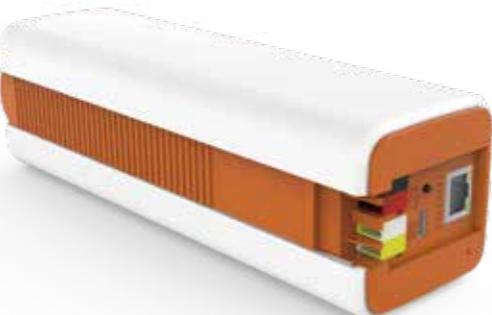


Smart control solution

智能控制方式



Product parameter / 产品信息

Motor type:	MAGE10B-KNX	Rated torque:	0.15Nm	Nominal voltage:	110-240V(50/60Hz)	Nominal Consumption:	9W	Nominal speed:	600r/min	Radio frequency:	433.92MHz
Max.load:	最大载重: 50KG	Running speed:	8-36cm/s	Power cable:	电源线类型: 2Wires	Isolation level:	B	IP index:	防护等级 IP20		




无尽之窗智能窗帘机



M A G E 1 0 B - 4 8 5

485总线 485bus-line

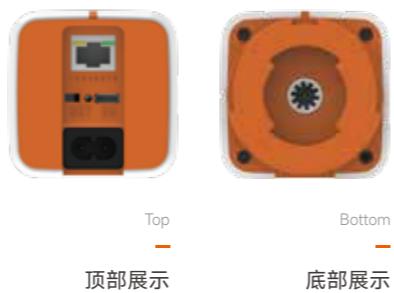

无尽之窗智能窗帘机




M A G E 1 0 B - 4 w i r e s

4芯强电 AC Power control




Smart control solution

智能控制方式

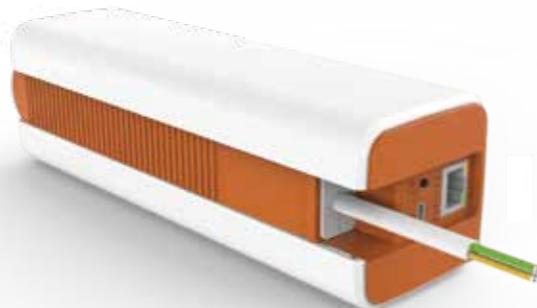

Smart control solution

智能控制方式

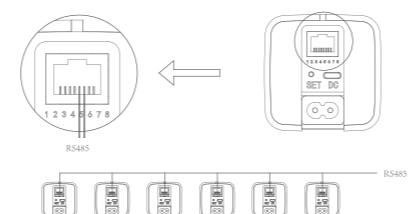


Product parameter / 产品信息

Motor type: 电机型号:	MAGE10B-485	Rated torque: 额定扭矩:	0.15Nm	Nominal voltage: 额定电压:	110-240V(50/60Hz)	Nominal Consumption: 额定功率:	9W	Nominal speed: 额定转速:	600r/min	Radio frequency: 无线频率:	433.92MHz
Max.load: 最大载重:	50KG	Running speed: 运行速度:	8-36cm/s	Power cable: 电源线类型:	2Wires	Isolation level: 绝缘等级:	B	IP index: 防护等级:	IP20		

Product parameter / 产品信息

Motor type: 电机型号:	MAGE10B-4 wires	Rated torque: 额定扭矩:	0.15Nm	Nominal voltage: 额定电压:	110-240V(50/60Hz)	Nominal Consumption: 额定功率:	9W	Nominal speed: 额定转速:	600r/min	Radio frequency: 无线频率:	433.92MHz
Max.load: 最大载重:	50KG	Running speed: 运行速度:	8-36cm/s	Power cable: 电源线类型:	4Wires	Isolation level: 绝缘等级:	B	IP index: 防护等级:	IP20		

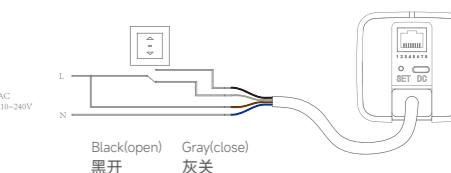

Curtain track system



窗帘轨道系统

直轨 Straight track system



Center-opening
双开



Side-opening
单开



Track buckle
轨道连接器



Runners
吊轮



Track profile
轨道



Rotary end hook
补偿挂钩



Ceiling bracket
顶装码


无尽之窗轨道系统涵盖多种窗帘轨道类型，包括直轨、蛇形轨、弧形轨。轨道类型多样，功能齐全，兼具质感与美感，满足各种窗户的智能遮阳产品需求。

The curtain track system covers a variety of curtain track types, including straight track, ripple fold track and curved track. Various types of tracks, different functions, both texture and beauty, to meet the needs of various window sunshade products.


Installation width for single track $\geq 10\text{CM}$
单轨窗帘盒预留宽度 $\geq 10\text{CM}$

Installation width for double tracks $\geq 20\text{CM}$
双轨窗帘盒预留宽度 $\geq 20\text{CM}$

蛇形轨 Ripple fold track system

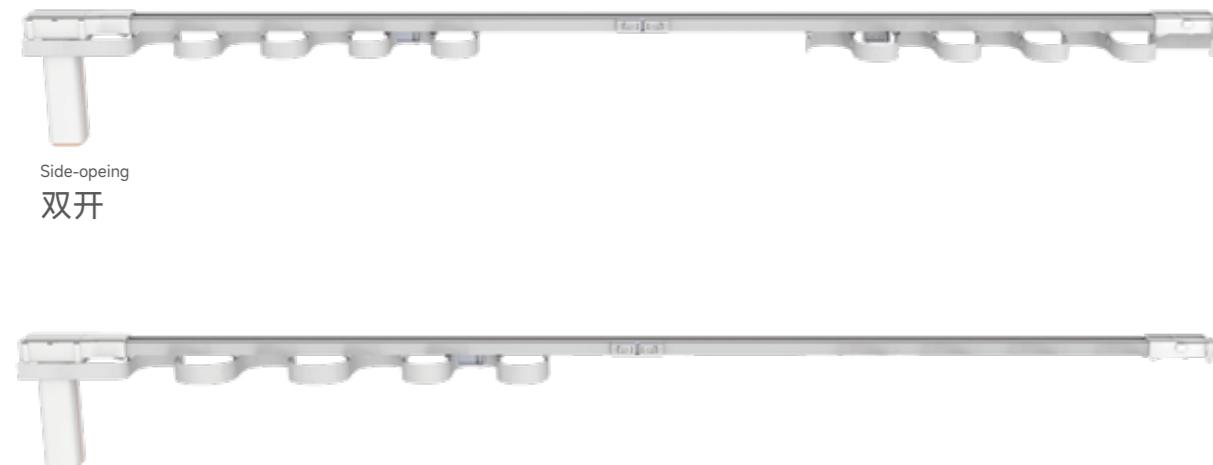Side-opening
双开Center-opening
单开Track buckle
轨道连接器Runner
吊轮Track profile
轨道End hook
尾端挂钩Ceiling bracket
顶装码

弯轨 Curved track system

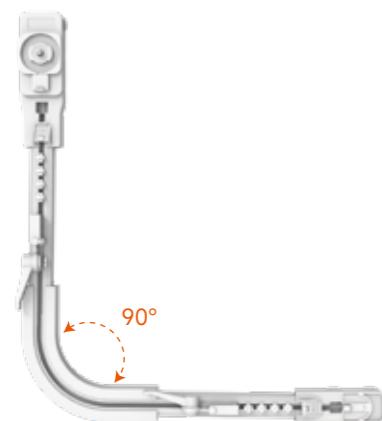Mater gear box
主传动箱Sub gear box
副传动箱Runner
吊轮90° track
90°轨道135° track
135°轨道Installation width for single track≥15CM
单轨窗帘盒预留宽度≥15CMInstallation width for double tracks≥30CM
双轨窗帘盒预留宽度≥30CM

No AC power supply solutions-Paladin series

∞

无电源方案-圣骑士系列

无尽之窗智能窗帘机提供丰富多样的无电源方案，绿色节能，更加环保。

A variety of no AC power solutions, green, energy-saving and more environmentally friendly.



无电源方案 No AC power supply solutions

∞

Low consumption motor


低功耗电机



NO.1

Power bank provide power to one curtain
充电宝给单个窗帘机供电

Last for 6 months
充满可用6个月

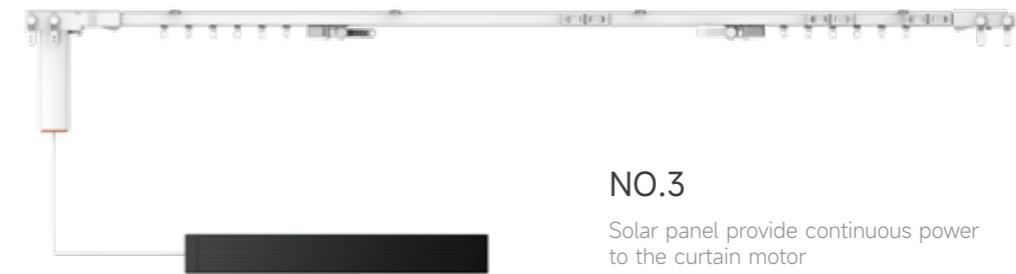

NO.3

Solar panel provide continuous power
to the curtain motor
太阳能板给窗帘机持续供电



NO.4


Solar panel provide continuous power to the power bank
Power bank provide power to one curtain motor
太阳能板给充电宝供电
充电宝再给单个窗帘机供电



NO.2

Power bank provide power to two curtain motors
充电宝给双个窗帘机供电

Last for 3 months.
充满可用3个月

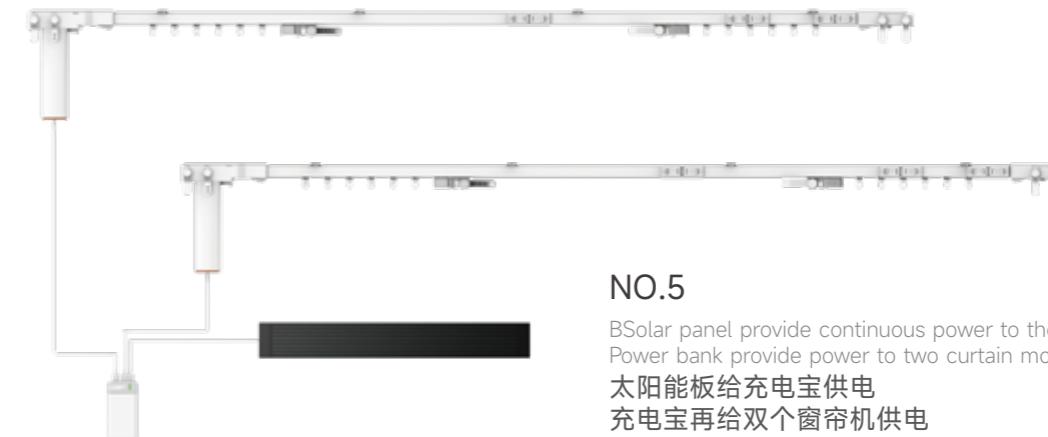

NO.5

BSolar panel provide continuous power to the power bank
Power bank provide power to two curtain motors
太阳能板给充电宝供电
充电宝再给双个窗帘机供电

安装方式 Installation mode



Extendable Smart Curtain System



伸缩智能窗帘机

NO.1

Paste on window glass

太阳能板安装在窗户玻璃上



NO.2

Install along the indoor wall

太阳能板安装室内墙沿



无尽之窗智能伸缩窗帘机系统，一款创新无皮带电动伸缩系统，最像手动轨道的电动伸缩系统。一拉一锁，两步完成超快速组装，停电也不怕，手拉超轻快，轻巧迷你机身，优质窄小轨道，超省空间，可拔插模块，超便捷实现智能功能切换。

ADD Window-Extendable Smart Curtain System, An innovative beltless motorized extendable system, The motorized extendable system which looks most like a manual system. Pull +lock, complete super fast assembly in just two steps, Not afraid of power off with very light manual start, Lightweight mini body, high-quality narrow track, save big space, Work with pluggable smart modules, get convenient access to different smart solutions.

伸缩智能窗帘机展示 Extendable track system display

Ceiling bracket
顶装码Smart module
智能模块Power adaptor
适配器

伸缩展示 Extendable display

Center-opening
双开Side-opening
单开

机轨一体式设计，DIY套装，含适配器，遥控器，单开双开均可实现，快速组装，运输无忧，选配智能模块，轻松获取不同智控方案。

Motor+track integrated system, DIY kit with all necessary components including power adaptor, remotecontrol and smart modules are optional; Central or side opening are both available, super quick DIY assembly, convenient transportation; Easy access to different smart control solutions.

伸缩智能窗帘机展示 Extendable track system display



规格 Models



MAGE20D-1



MAGE20D-1.5



MAGE20D-2.2

Product parameter / 产品信息

Model No. 型号:	MAGE10D-1	Input voltage: 输入电压:	12V	Rated power: 输入功率:	12W	Rated current: 额定电流:	1A	Protect Grade: 防护等级:	IP20	Working temperature: 工作温度:	-20°C-55°C
Working humidity: 工作湿度:	0-95%RH	Insulation Grade: 绝缘等级:	B	Product length: 套装长度:	1M	Suitable for: 适用尺寸:	1.0-1.6M	Max load: 最大载重:	12KG		
Model No. 型号:	MAGE10D-1.5	Input voltage: 输入电压:	12V	Rated power: 输入功率:	12W	Rated current: 额定电流:	1A	Protect Grade: 防护等级:	IP20	Working temperature: 工作温度:	-20°C-55°C
Working humidity: 工作湿度:	0-95%RH	Insulation Grade: 绝缘等级:	B	Product length: 套装长度:	1.5M	Suitable for: 适用尺寸:	1.5-2.6M	Max load: 最大载重:	12KG		
Model No. 型号:	MAGE10D-2.2	Input voltage: 输入电压:	12V	Rated power: 输入功率:	12W	Rated current: 额定电流:	1A	Protect Grade: 防护等级:	IP20	Working temperature: 工作温度:	-20°C-55°C
Working humidity: 工作湿度:	0-95%RH	Insulation Grade: 绝缘等级:	B	Product length: 套装长度:	2.2M	Suitable for: 适用尺寸:	2.5-4M	Max load: 最大载重:	12KG		

智能控制方式 Intelligent control method



智能通讯协议


matter zigbee

Pluggable module
插拔式模块


Smart ecology



智能生态



小爱同学



天猫精灵



华为小艺



百度小度



Homepod

为更多定制智控品台的对接提供专业技术服务与支持

Provide professional technical services and supports for docking with more customized smart control protocols or platforms

CONTENT NO.4

Smart tubular motor-Shaman series



智能管状电机-萨满系列

无尽之窗萨满系列智能管状电机，适配电动卷帘，百叶等不同产品，搭配不同智能方案，供电方案，实现多种控制方式。

ADD Window Shaman series smart tubular motors are suitable for different products , such as roller blinds,shutters... paired with different smart solutions and power supply solutions to achieve various controls.

Roller blind motor



智能卷帘电机


智能卷帘电机，可适配不用型号卷帘，机械限位&电子限位，强弱电供电方案，搭配不同智能模块.....
多种功能类型，满足您不同场景的需求。智能与节能，尽在无尽之窗.....

Roller shutter tubular motor series, adapted to different types of roller tubes, with mechanical&electronic limits, paired with different smart modules, work with AC and low voltage power supply solutions... Multiple types to meet your different needs. Smart and energy-saving, from ADD window.....



智能卷帘爆炸图 Smart roller blind exploded view

∞

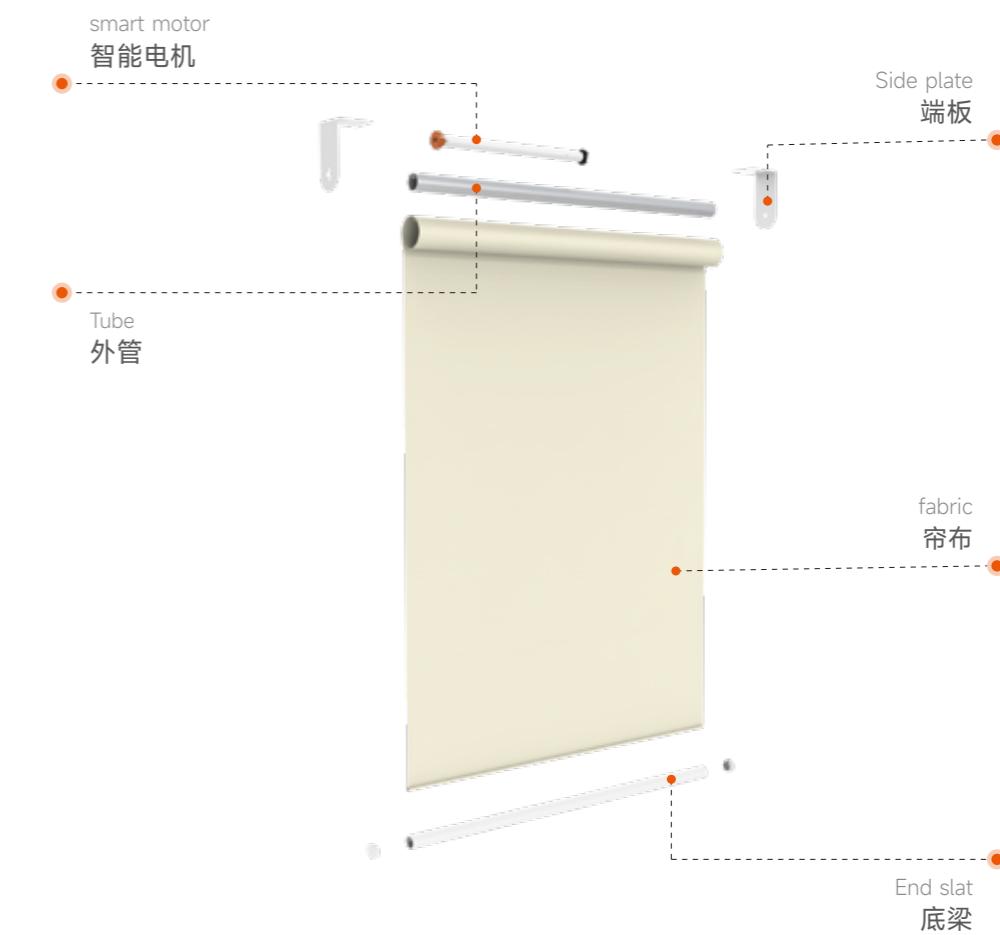

Smart protocol

智能控制协议

matter

zigbee




485 总线

Φ25直流管状电机DC tubular motor



S H A M A N 2 5 E T

内置变压器Built-in transformer

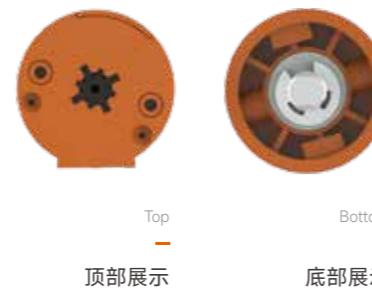

Functions

功 能 特 点

01

AC 110-240V

宽电压供电
110-240V

03

Limits setting by remote

遥控设限位

02

Electronic limit

电子限位
行程

04

Remote control

遥控控制

05

Quiet


超静音运行

Φ25直流管状电机DC tubular motor



S H A M A N 2 5 E B

内置锂电池Built-in lithium battery

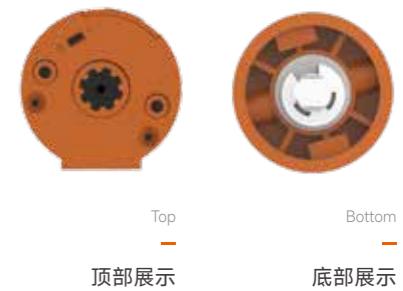

Functions

功 能 特 点

01

DC 5V

Electronic limit

电压 5V

电子限位
行程

03

Limits setting by remote

遥控设限位

Remote control

遥控控制

06

Battery capacity 2600mAH

电池容量 2600mAH

Quiet

超静音运行



No AC power supply solution

无 电 源 方 案



Product parameter / 产品信息

Motor type: 电机型号:	SHAMAN 25ET-1/30	Nominal voltage: 额定电压:	110-240V	Nominal frequency: 额定频率:	50/60Hz	Nominal current: 额定电流:	1A	Nominal consumption: 额定功率:	12W	Protection time: 热保护时间:	/	Radio frequency: 遥控频率:	433.92MHz
Nominal torque: 额定扭矩:	1NM	Nominal speed: 额定转速:	30RPM	Maximum turns: 限位圈数:	/	Power cable: 电源线类别:	2Wires	Protection index: 防护等级:	IP44	Limit switch type: 行程功能:	电子 electronic		



485总线

Product parameter / 产品信息


Motor type: 电机型号:	SHAMAN 25EB-1/30	Nominal voltage: 额定电压:	5V	Nominal frequency: 额定频率:	/	Nominal current: 额定电流:	1A	Nominal consumption: 额定功率:	12W	Protection time: 热保护时间:	/	Radio frequency: 遥控频率:	433.92MHz
Nominal torque: 额定扭矩:	1NM	Nominal speed: 额定转速:	30RPM	Maximum turns: 限位圈数:	/	Power cable: 电源线类别:	2Wires	Protection index: 防护等级:	IP44	Limit switch type: 行程功能:	电子 electronic		

Φ35交流管状电机AC tubular motor



S H A M A N 3 5 R

机械内置型 Mechanical radio

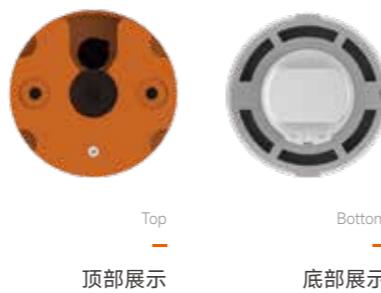


Φ35交流管状电机AC tubular motor



S H A M A N 3 5 S

标准型 Standard type

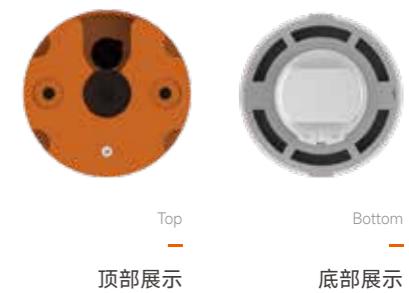

Functions

功能特点



- | | |
|------------------|----------------|
| 01 | 02 |
| AC 220-240V | Radio type |
| 电压 220-240V | 内置型 |
| 03 | 04 |
| Mechanical limit | Remote control |
| 机械限位行程 | 遥控控制 |



- | | |
|------------------|----------------|
| 01 | 02 |
| AC 220-240V | Standard type |
| 电压 220-240V | 标准型 |
| 03 | 04 |
| Mechanical limit | Switch control |
| 机械限位行程 | 开关控制 |

Product parameter / 产品信息

Motor type: SHAMAN 35R-3/28	Nominal voltage: 220-240V	Nominal frequency: 50/60Hz	Nominal current: 0.55A	Nominal consumption: 130W	Protection time: 4Min	Radio frequency: 433.92MHz
	Nominal torque: 3NM	Nominal speed: 28RPM	Maximum turns: 27	Power cable: 3Wires	Protection index: IP44	Limit switch type: 机械 mechanical

Motor type: SHAMAN 35R-6/28	Nominal voltage: 220-240V	Nominal frequency: 50/60Hz	Nominal current: 0.65A	Nominal consumption: 145W	Protection time: 4Min	Radio frequency: 433.92MHz
	Nominal torque: 6NM	Nominal speed: 28RPM	Maximum turns: 27	Power cable: 3Wires	Protection index: IP44	Limit switch type: 机械 mechanical

Motor type: SHAMAN 35R-10/17	Nominal voltage: 220-240V	Nominal frequency: 50/60Hz	Nominal current: 0.65A	Nominal consumption: 145W	Protection time: 4Min	Radio frequency: 433.92MHz
	Nominal torque: 10NM	Nominal speed: 17RPM	Maximum turns: 27	Power cable: 3Wires	Protection index: IP44	Limit switch type: 机械 mechanical

Product parameter / 产品信息

Motor type: SHAMAN 35S-3/28	Nominal voltage: 220-240V	Nominal frequency: 50/60Hz	Nominal current: 0.55A	Nominal consumption: 130W	Protection time: 4Min	Radio frequency: /
	Nominal torque: 3NM	Nominal speed: 28RPM	Maximum turns: 27	Power cable: 4Wires	Protection index: IP44	Limit switch type: 机械 mechanical

Motor type: SHAMAN 35S-6/28	Nominal voltage: 220-240V	Nominal frequency: 50/60Hz	Nominal current: 0.65A	Nominal consumption: 145W	Protection time: 4Min	Radio frequency: /
	Nominal torque: 6NM	Nominal speed: 28RPM	Maximum turns: 27	Power cable: 4Wires	Protection index: IP44	Limit switch type: 机械 mechanical

Motor type: SHAMAN 35S-10/17	Nominal voltage: 220-240V	Nominal frequency: 50/60Hz	Nominal current: 0.65A	Nominal consumption: 145W	Protection time: 4Min	Radio frequency: /
	Nominal torque: 10NM	Nominal speed: 17RPM	Maximum turns: 27	Power cable: 4Wires	Protection index: IP44	Limit switch type: 机械 mechanical

Φ35交流管状电机AC tubular motor



S H A M A N 3 5 E

电子内置型 Electronic radio




Φ45交流管状电机AC tubular motor



S H A M A N 4 5 S

标准型 Standard type

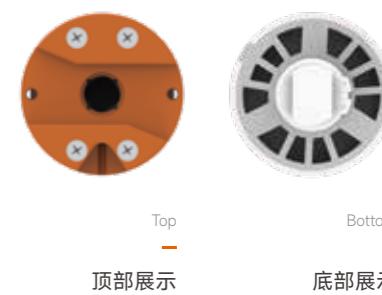

Functions

功能特点



- | | |
|--------------------------|------------------|
| 01 | 02 |
| AC 220-240V | Electronic limit |
| 电压 220-240V | 电子限位行程 |
| 03 | 04 |
| Limits setting by remote | Remote control |
| 遥控设限位 | 遥控控制 |



Functions

功能特点

- | | |
|------------------|----------------|
| 01 | 02 |
| AC 220-240V | Standard type |
| 电压 220-240V | 标准型 |
| 03 | 04 |
| Mechanical limit | Switch control |
| 机械限位行程 | 开关控制 |

Product parameter / 产品信息

tuya matter 485总线

Motor type: SHAMAN 35E-3/28	Nominal voltage: 220-240V	Nominal frequency: 50/60Hz	Nominal current: 0.55A	Nominal consumption: 130W	Protection time: 4Min	Radio frequency: 433.92MHz
	Nominal torque: 3NM	Nominal speed: 28RPM	Maximum turns: /	Power cable: 3Wires	Protection index: IP44	Limit switch type: 电子 electronic

Motor type: SHAMAN 35E-6/28	Nominal voltage: 220-240V	Nominal frequency: 50/60Hz	Nominal current: 0.65A	Nominal consumption: 145W	Protection time: 4Min	Radio frequency: 433.92MHz
	Nominal torque: 6NM	Nominal speed: 28RPM	Maximum turns: /	Power cable: 3Wires	Protection index: IP44	Limit switch type: 电子 electronic

Motor type: SHAMAN 35E-10/17	Nominal voltage: 220-240V	Nominal frequency: 50/60Hz	Nominal current: 0.65A	Nominal consumption: 145W	Protection time: 4Min	Radio frequency: 433.92MHz
	Nominal torque: 10NM	Nominal speed: 17RPM	Maximum turns: /	Power cable: 3Wires	Protection index: IP44	Limit switch type: 电子 electronic

Product parameter / 产品信息

Motor type: SHAMAN 45S-10/28	Nominal voltage: 220-240V	Nominal frequency: 50/60Hz	Nominal current: 0.75A	Nominal consumption: 175W	Protection time: 4Min	Radio frequency: /
	Nominal torque: 10NM	Nominal speed: 28RPM	Maximum turns: 40	Power cable: 4Wires	Protection index: IP44	Limit switch type: 电子 electronic

Motor type: SHAMAN 45S-20/15	Nominal voltage: 220-240V	Nominal frequency: 50/60Hz	Nominal current: 0.65A	Nominal consumption: 145W	Protection time: 4Min	Radio frequency: /
	Nominal torque: 20NM	Nominal speed: 15RPM	Maximum turns: 40	Power cable: 4Wires	Protection index: IP44	Limit switch type: 电子 electronic


Motor type: SHAMAN 45S-20/28	Nominal voltage: 220-240V	Nominal frequency: 50/60Hz	Nominal current: 1.1A	Nominal consumption: 250W	Protection time: 4Min	Radio frequency: /
	Nominal torque: 20NM	Nominal speed: 28RPM	Maximum turns: 40	Power cable: 4Wires	Protection index: IP44	Limit switch type: 电子 electronic

Φ45交流管状电机AC tubular motor



S H A M A N 4 5 R

机械内置型 Mechanical radio

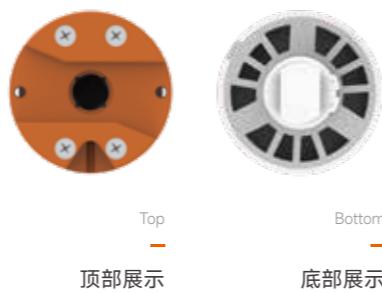

Top
Bottom
顶部展示
底部展示

Φ45交流管状电机AC tubular motor



S H A M A N 4 5 E

电子内置型 Electronic radio



Top
Bottom
顶部展示
底部展示

Functions

功能特点



- | | |
|------------------|----------------|
| 01 | 02 |
| AC 220-240V | Radio type |
| 电压 220-240V | 内置型 |
| | |
| 03 | 04 |
| Mechanical limit | Remote control |
| 机械限位行程 | 遥控控制 |



- | | |
|--------------------------|------------------|
| 01 | 02 |
| AC 220-240V | Electronic limit |
| 电压 220-240V | 电子限位行程 |
| | |
| 03 | 04 |
| Limits setting by remote | Remote control |
| 遥控器设限位 | 遥控控制 |

Product parameter / 产品信息

Motor type: 电机型号:	SHAMAN 45R-10/28	Nominal voltage: 额定电压:	220-240V	Nominal frequency: 额定频率:	50/60Hz	Nominal current: 额定电流:	0.75A	Nominal consumption: 额定功率:	175W	Protection time: 热保护时间:	4Min	Radio frequency: 遥控频率:	433.92MHz
Nominal torque: 额定扭矩:	10NM	Nominal speed: 额定转速:	28RPM	Maximum turns: 限位圈数:	40	Power cable: 电源线类别:	3Wires	Protection index: 防护等级:	IP44	Limit switch type: 行程功能:	机械 mechanical		

Motor type: 电机型号:	SHAMAN 45R-20/15	Nominal voltage: 额定电压:	220-240V	Nominal frequency: 额定频率:	50/60Hz	Nominal current: 额定电流:	0.65A	Nominal consumption: 额定功率:	145W	Protection time: 热保护时间:	4Min	Radio frequency: 遥控频率:	433.92MHz
Nominal torque: 额定扭矩:	20NM	Nominal speed: 额定转速:	15RPM	Maximum turns: 限位圈数:	40	Power cable: 电源线类别:	3Wires	Protection index: 防护等级:	IP44	Limit switch type: 行程功能:	机械 mechanical		

Motor type: 电机型号:	SHAMAN 45R-20/28	Nominal voltage: 额定电压:	220-240V	Nominal frequency: 额定频率:	50/60Hz	Nominal current: 额定电流:	1.1A	Nominal consumption: 额定功率:	250W	Protection time: 热保护时间:	4Min	Radio frequency: 遥控频率:	433.92MHz
Nominal torque: 额定扭矩:	20NM	Nominal speed: 额定转速:	28RPM	Maximum turns: 限位圈数:	40	Power cable: 电源线类别:	3Wires	Protection index: 防护等级:	IP44	Limit switch type: 行程功能:	机械 mechanical		

Product parameter / 产品信息

Motor type: 电机型号:	SHAMAN 45E-10/28	Nominal voltage: 额定电压:	220-240V	Nominal frequency: 额定频率:	50/60Hz	Nominal current: 额定电流:	0.75A	Nominal consumption: 额定功率:	175W	Protection time: 热保护时间:	4Min	Radio frequency: 遥控频率:	433.92MHz
Nominal torque: 额定扭矩:	10NM	Nominal speed: 额定转速:	28RPM	Maximum turns: 限位圈数:	/	Power cable: 电源线类别:	3Wires	Protection index: 防护等级:	IP44	Limit switch type: 行程功能:	电子 electronic		

Motor type: 电机型号:	SHAMAN 45E-20/15	Nominal voltage: 额定电压:	220-240V	Nominal frequency: 额定频率:	50/60Hz	Nominal current: 额定电流:	0.65A	Nominal consumption: 额定功率:	145W	Protection time: 热保护时间:	4Min	Radio frequency: 遥控频率:	433.92MHz
Nominal torque: 额定扭矩:	20NM	Nominal speed: 额定转速:	15RPM	Maximum turns: 限位圈数:	/	Power cable: 电源线类别:	3Wires	Protection index: 防护等级:	IP44	Limit switch type: 行程功能:	电子 electronic		

Motor type: 电机型号:	SHAMAN 45E-20/28	Nominal voltage: 额定电压:	220-240V	Nominal frequency: 额定频率:	50/60Hz	Nominal current: 额定电流:	1.1A	Nominal consumption: 额定功率:	250W	Protection time: 热保护时间:	4Min	Radio frequency: 遥控频率:	433.92MHz
Nominal torque: 额定扭矩:	20NM	Nominal speed: 额定转速:	28RPM	Maximum turns: 限位圈数:	/	Power cable: 电源线类别:	3Wires	Protection index: 防护等级:	IP44	Limit switch type: 行程功能:	电子 electronic		


Zip screen motor

∞


智能防风卷帘电机

上行遇阻保护功能，下行遇阻反弹功能尤其灵敏，避免阻碍物品以及防风卷帘自身的损伤。

Obstacle detection in upward direction, Obstacle detection in downward direction is especially sensitive. Avoid the damage of the obstacle and zip screen itself.

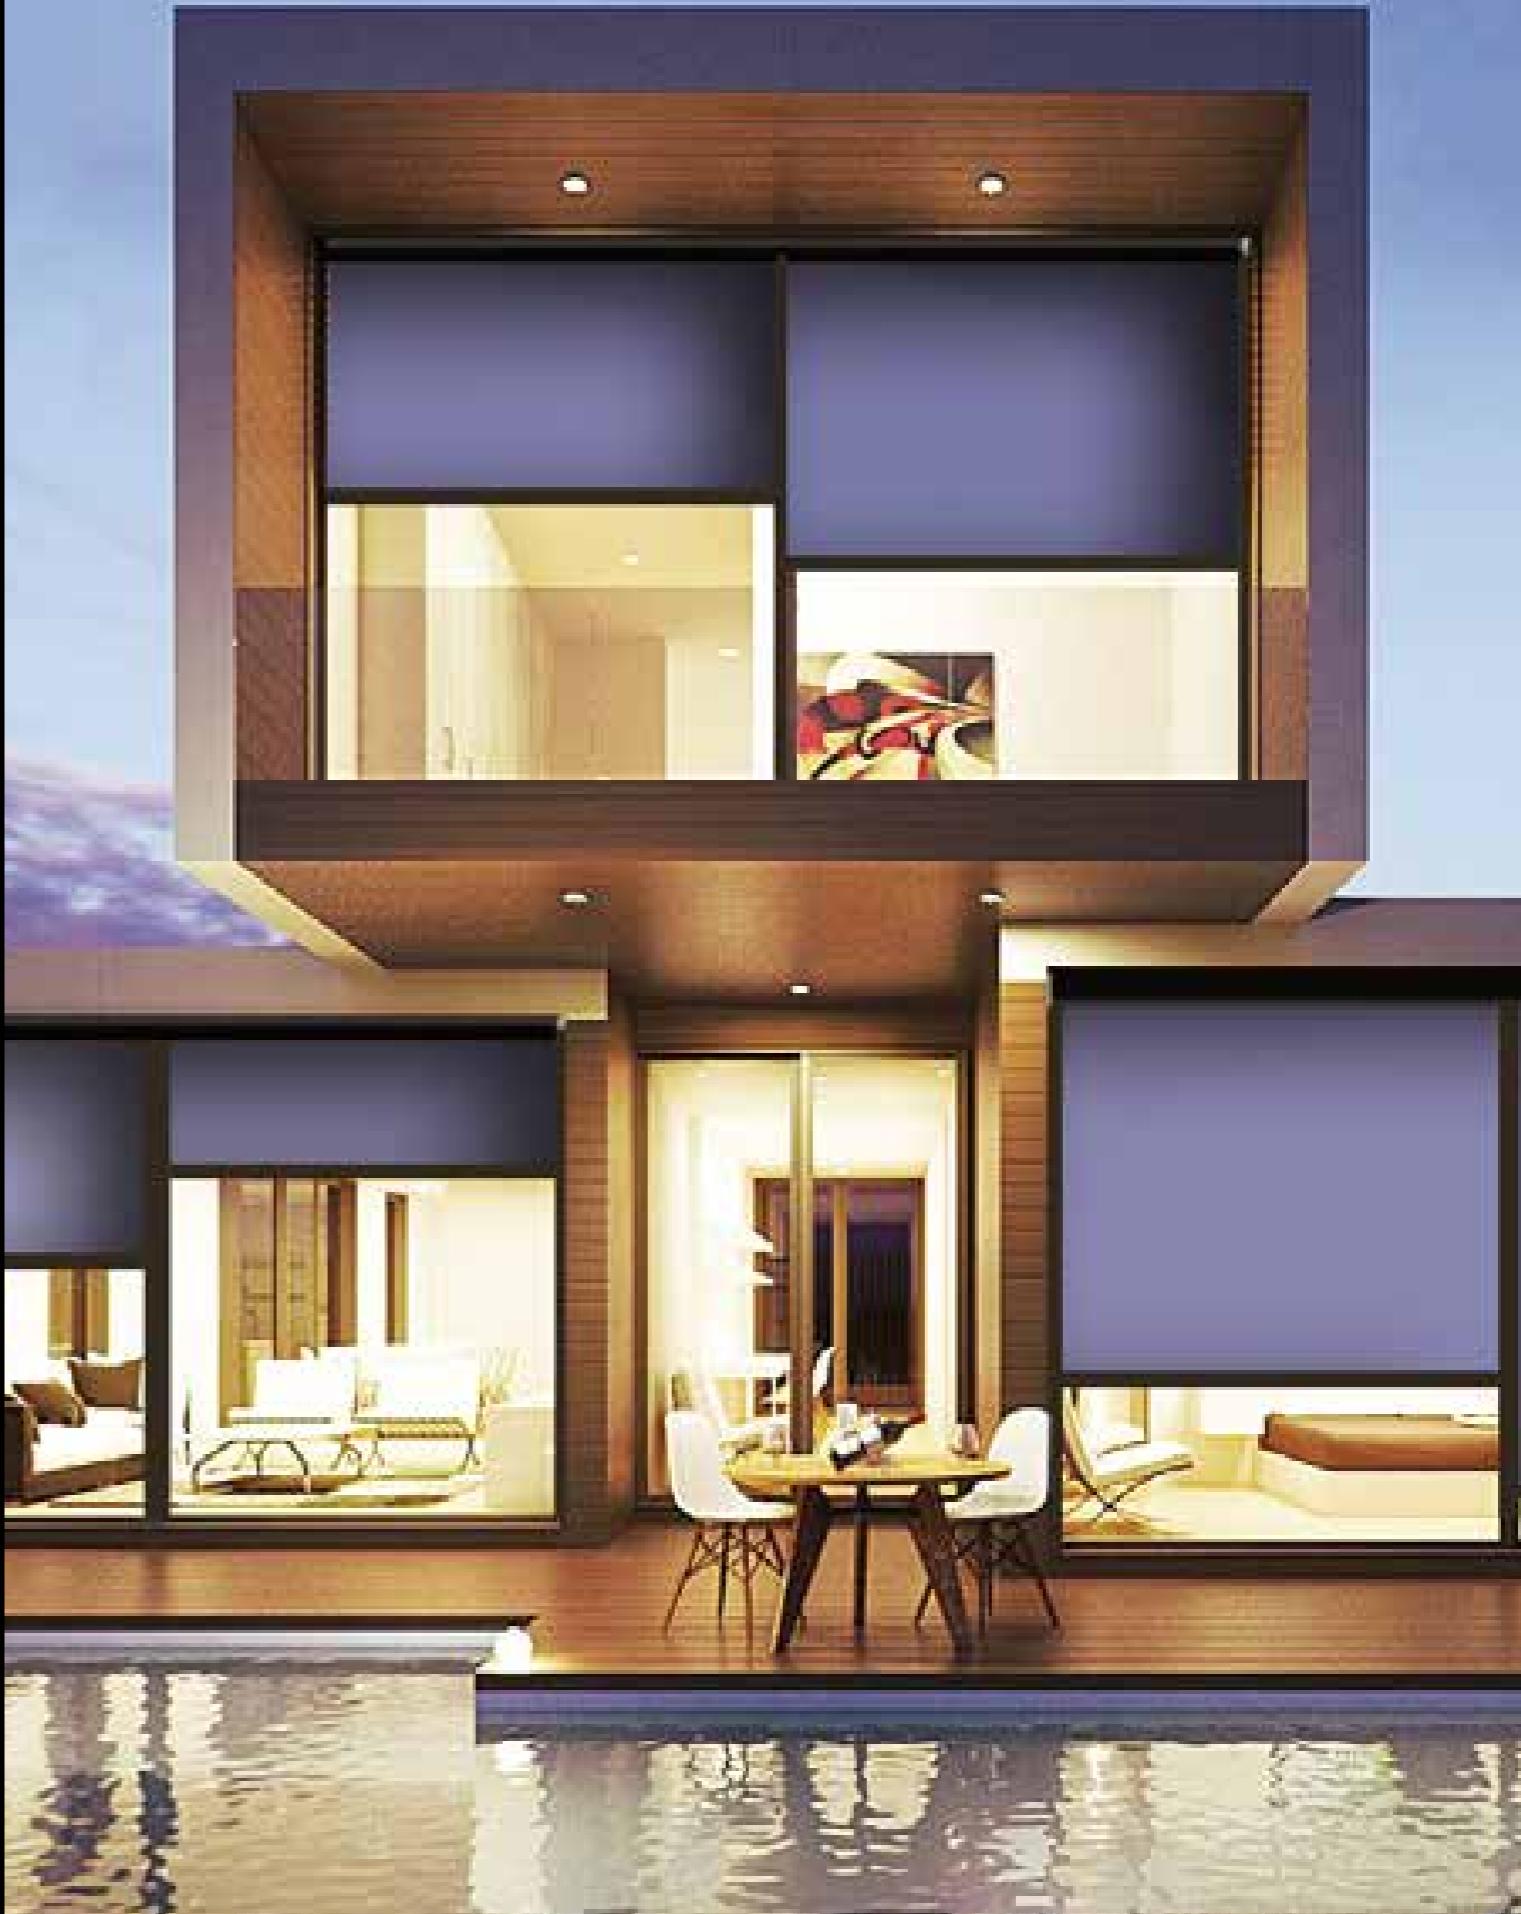

智能防风卷帘爆炸图 The smart zip screen exploded view

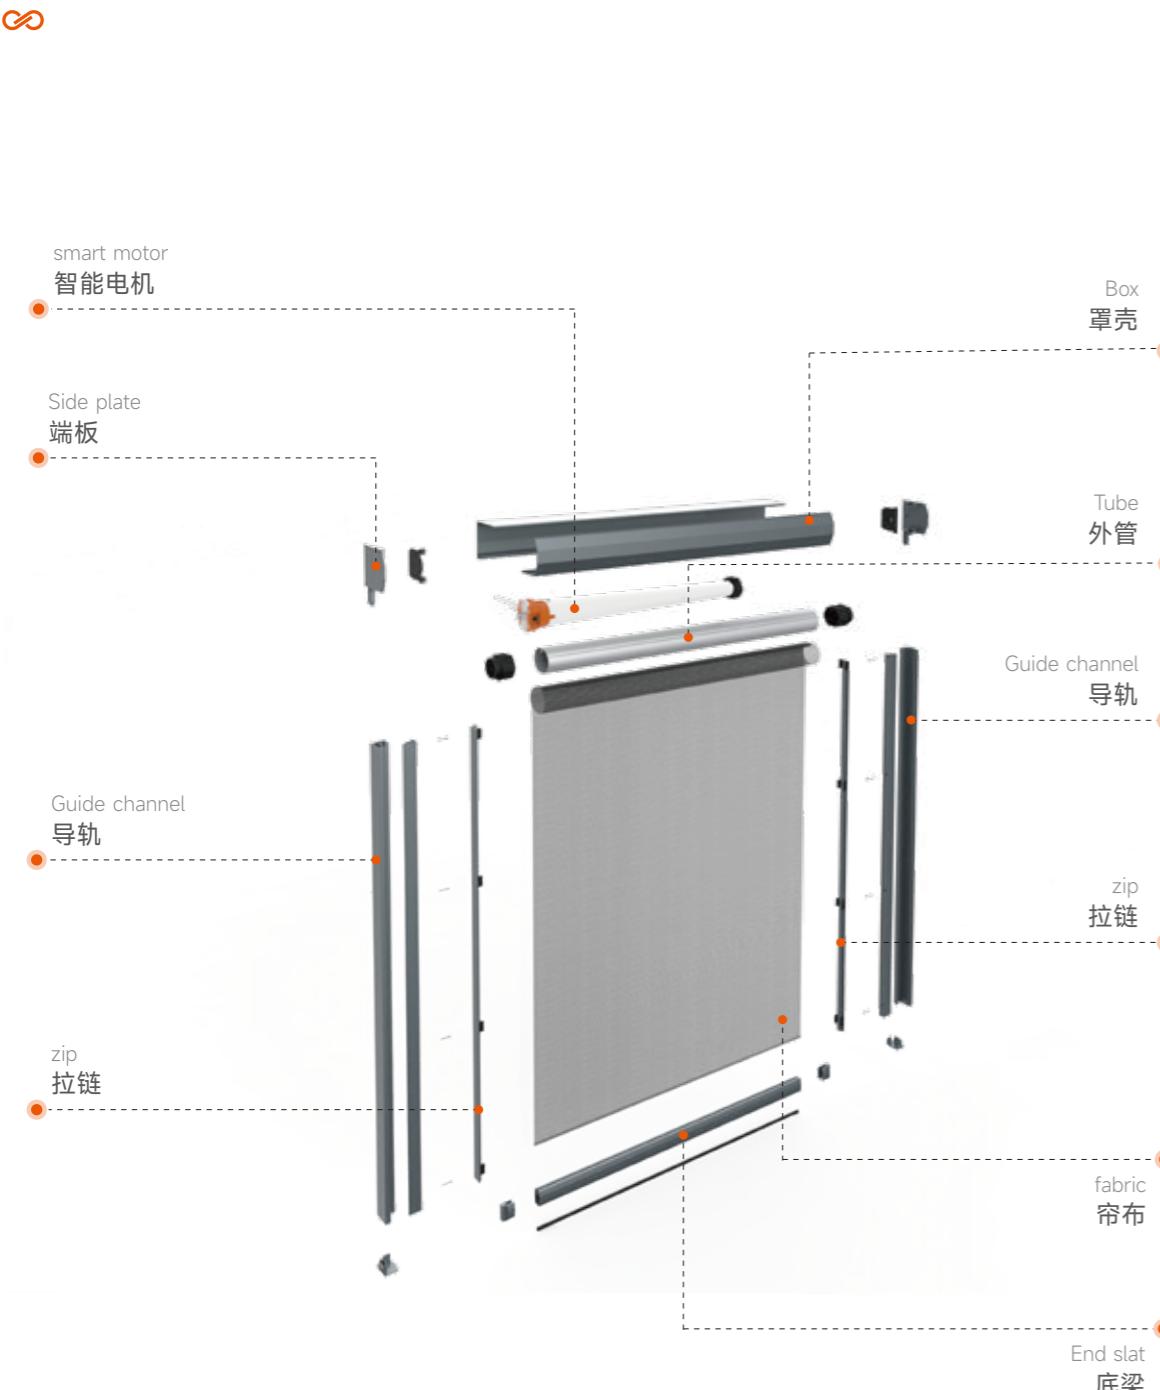

Smart protocol


智能控制协议



485总线

Φ45直流管状电机DC tubular motor

SHAMAN 45DE
12V供电 12V power supply

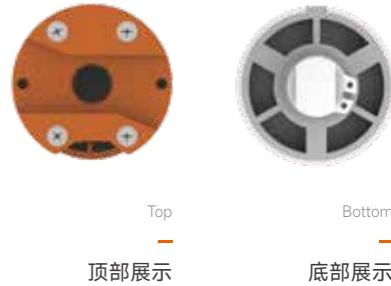

Functions 功能特点

- | | |
|----|--|
| 01 | DC 12V |
| 02 | Electronic limit
电压 12V
电子限位 行程 |
| 03 | Limits setting by remote
Remote control
遥控设限位 遥控控制 |
| 04 | Obstacle rebound
遇阻反弹 |



No AC power supply solution 无电源方案



Paladin 112
圣骑士系列

Battery capacity 5000mAH
电池容量 5000mAH

Product parameter / 产品信息

Motor type: SHAMAN 45DE-25/11	Nominal voltage: 12V	Nominal frequency: /	Nominal current: 3A	Nominal consumption: 36W	Protection time: /	Radio frequency: 433.92MHz
Nominal torque: 25NM	Nominal speed: 11RPM	Maximum turns: /	Power cable: 电源线类别: /	Protection index: IP44	Limit switch type: 电子 electronic	

Φ45交流管状电机AC tubular motor



S H A M A N 4 5 E

电子内置型 Electronic radio

Top
顶部展示
Bottom
底部展示

Functions

功能特点

01

AC 220-240V

02

Electronic limit

03

电压 220-240V

04

电子限位行程

05

Limits setting by remote

06

Remote control 遥控设限位

07

Obstacle rebound

08

遇阻反弹

Product parameter / 产品信息



485总线


Motor type: SHAMAN 45E-20/15	Nominal voltage: 220-240V	Nominal frequency: 50/60Hz	Nominal current: 0.65A	Nominal consumption: 145W	Protection time: 4Min	Radio frequency: 433.92MHz
Nominal torque: 20NM	Nominal speed: 15RPM	Maximum turns: /	Power cable: 3Wires	Protection index: IP44	Limit switch type: 行程功能: 电子 electronic	

Motor type: SHAMAN 45E-30/15	Nominal voltage: 220-240V	Nominal frequency: 50/60Hz	Nominal current: 0.75A	Nominal consumption: 175W	Protection time: 4Min	Radio frequency: 433.92MHz
Nominal torque: 30NM	Nominal speed: 15RPM	Maximum turns: /	Power cable: 3Wires	Protection index: IP44	Limit switch type: 行程功能: 电子 electronic	


Motor type: SHAMAN 45E-40/15	Nominal voltage: 220-240V	Nominal frequency: 50/60Hz	Nominal current: 1.1A	Nominal consumption: 250W	Protection time: 4Min	Radio frequency: 433.92MHz
Nominal torque: 40NM	Nominal speed: 15RPM	Maximum turns: /	Power cable: 3Wires	Protection index: IP44	Limit switch type: 行程功能: 电子 electronic	

Motor type: SHAMAN 45E-50/12	Nominal voltage: 220-240V	Nominal frequency: 50/60Hz	Nominal current: 1.1A	Nominal consumption: 250W	Protection time: 4Min	Radio frequency: 433.92MHz
Nominal torque: 50NM	Nominal speed: 12RPM	Maximum turns: /	Power cable: 3Wires	Protection index: IP44	Limit switch type: 行程功能: 电子 electronic	


防风卷帘电机配件 Accessories for zip screen smart motor

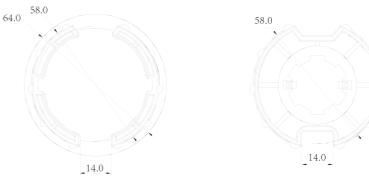Tube
63外管Model No.
型号Size
尺寸图Drive adapter
皇冠驱动

Round 63

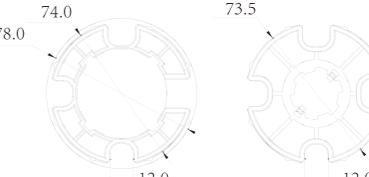Tube
78外管Model No.
型号Size
尺寸图Drive adapter
皇冠驱动

Round 78

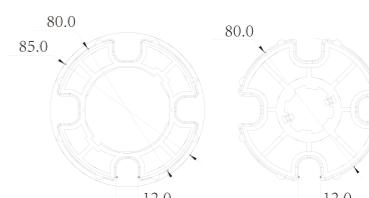Tube
85外管Model No.
型号Size
尺寸图Drive adapter
皇冠驱动

Round 85

Roller shutter motor

∞

智能卷窗电机

智能卷窗电机按管径可分为35mm、45mm，按限位类型可分为标准型、遥控型、电子型，除常规开关、遥控控制外，还可实现APP智能控制。对于无交流电源的安装环境，可采用太阳能电池供电。节能与智能，尽在无尽之窗。

There are 35mm and 45mm tubular motor, Including standard type, radio type and electronic type. It can achieve mobile app control besides normal switch and remote control. Solar battery solution is available in case of no AC power supply. Smart and Energy-saving, all from ADD Window.




Φ35交流管状电机AC tubular motor



S H A M A N 3 5 S

标准型 Standard type

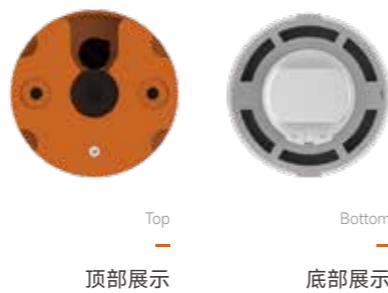

Functions

功 能 特 点

01

AC 220-240V

02

Standard type

电压 220-240V

标准型

03

Mechanical limit

04

Switch control

机械限位行程

开关控制

Product parameter / 产品信息

Motor type: 电机型号:	SHAMAN 35S-10/17	Nominal voltage: 额定电压:	220-240V	Nominal frequency: 额定频率:	50/60Hz	Nominal current: 额定电流:	0.65A	Nominal consumption: 额定功率:	145W	Protection time: 热保护时间:	4Min	Radio frequency: 遥控频率:	/
Nominal torque: 额定扭矩:	10NM	Nominal speed: 额定转速:	17RPM	Maximum turns: 限位圈数:	27	Power cable: 电源线类别:	4Wires	Protection index: 防护等级:	IP44	Limit switch type: 行程功能:	机械 mechanical		


Motor type: 电机型号:	SHAMAN 35S-13/12	Nominal voltage: 额定电压:	220-240V	Nominal frequency: 额定频率:	50/60Hz	Nominal current: 额定电流:	0.65A	Nominal consumption: 额定功率:	145W	Protection time: 热保护时间:	4Min	Radio frequency: 遥控频率:	/
Nominal torque: 额定扭矩:	13NM	Nominal speed: 额定转速:	12RPM	Maximum turns: 限位圈数:	27	Power cable: 电源线类别:	4Wires	Protection index: 防护等级:	IP44	Limit switch type: 行程功能:	机械 mechanical		

Φ35交流管状电机AC tubular motor



S H A M A N 3 5 R

机械内置型 Mechanical radio

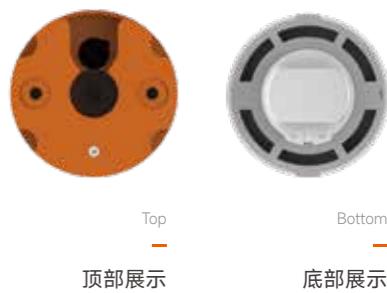

Functions

功 能 特 点

01

AC 220-240V

02

Radio type

电压 220-240V

内置型

03

Mechanical limit

04

Remote control

机械限位行程

遥控控制

Product parameter / 产品信息

Motor type: 电机型号:	SHAMAN 35R-10/17	Nominal voltage: 额定电压:	220-240V	Nominal frequency: 额定频率:	50/60Hz	Nominal current: 额定电流:	0.65A	Nominal consumption: 额定功率:	145W	Protection time: 热保护时间:	4Min	Radio frequency: 遥控频率:	433.92MHz
Nominal torque: 额定扭矩:	10NM	Nominal speed: 额定转速:	17RPM	Maximum turns: 限位圈数:	27	Power cable: 电源线类别:	3Wires	Protection index: 防护等级:	IP44	Limit switch type: 行程功能:	机械 mechanical		

Motor type: 电机型号:	SHAMAN 35R-13/12	Nominal voltage: 额定电压:	220-240V	Nominal frequency: 额定频率:	50/60Hz	Nominal current: 额定电流:	0.65A	Nominal consumption: 额定功率:	145W	Protection time: 热保护时间:	4Min	Radio frequency: 遥控频率:	433.92MHz
Nominal torque: 额定扭矩:	13NM	Nominal speed: 额定转速:	12RPM	Maximum turns: 限位圈数:	27	Power cable: 电源线类别:	3Wires	Protection index: 防护等级:	IP44	Limit switch type: 行程功能:	机械 mechanical		

Φ35交流管状电机AC tubular motor



S H A M A N 3 5 E

电子内置型 Electronic radio



Product parameter / 产品信息

tuya matter 485总线

Motor type: SHAMAN 35E-10/17	Nominal voltage: 220-240V	Nominal frequency: 50/60Hz	Nominal current: 0.65A	Nominal consumption: 145W	Protection time: 4Min	Radio frequency: 433.92MHz
Nominal torque: 10NM	Nominal speed: 17RPM	Maximum turns: /	Power cable: 3Wires	Protection index: IP44	Limit switch type: 电子 electronic	


Motor type: SHAMAN 35E-13/12	Nominal voltage: 220-240V	Nominal frequency: 50/60Hz	Nominal current: 0.65A	Nominal consumption: 145W	Protection time: 4Min	Radio frequency: 433.92MHz
Nominal torque: 13NM	Nominal speed: 12RPM	Maximum turns: /	Power cable: 3Wires	Protection index: IP44	Limit switch type: 电子 electronic	

Φ45直流管状电机DC tubular motor



S H A M A N 4 5 D E

12V供电 12V power supply

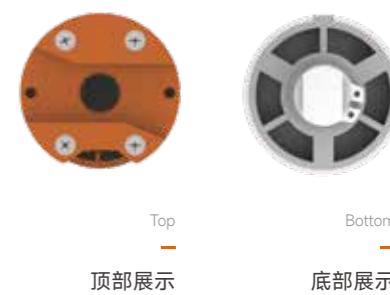

Functions

功 能 特 点

01 DC 12V

Electronic limit

02 电压 12V

电子限位 行程

03 Limits setting by remote

Remote control

04 遥控设限位

遥控控制

05

Obstacle rebound

遇阻反弹

No AC power supply solution

无 电 源 方 案



电池容量 5000mAH

Battery capacity 5000mAH


Product parameter / 产品信息

Motor type: SHAMAN 45DE-25/11	Nominal voltage: 12V	Nominal frequency: /	Nominal current: 3A	Nominal consumption: 36W	Protection time: /	Radio frequency: 433.92MHz
Nominal torque: 25NM	Nominal speed: 11RPM	Maximum turns: /	Power cable: 3Wires	Protection index: IP44	Limit switch type: 电子 electronic	

Φ45交流管状电机AC tubular motor

S H A M A N 4 5 S

标准型 Standard type

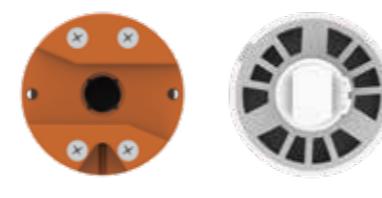


Top
—
底部展示

Φ45交流管状电机AC tubular motor

6

S H A M A N 4 5 E

机械内置型 Mechanical radio

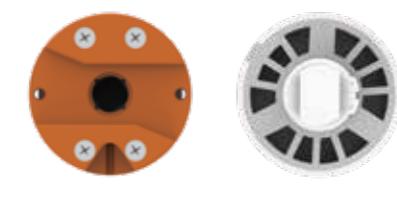

The diagram consists of two horizontal bars. The left bar is labeled "Top" at its midpoint. The right bar is labeled "Bottom" at its midpoint. Both labels are oriented vertically.

Functions

功能特点



01	220-240V	Standard type
02	0-240V	Standard type
03	nical limit	Switch control
位行程		开关控制

01	AC 220-240V	Radio type
02	电压 220-240V	内置型
03	Mechanical limit	Remote control
04	机械限位行程	遥控控制

Product parameter / 产品信息

Motor type: 电机型号:	SHAMAN 45S-10/15	Nominal voltage: 额定电压:	220-240V	Nominal frequency: 额定频率:	50/60Hz	Nominal current: 额定电流:	0.65A	Nominal consumption: 额定功率:	145W	Protection time: 热保护时间:	4Min	Radio frequency: 遥控频率:	/
		Nominal torque: 额定扭矩:	10NM	Nominal speed: 额定转速:	15RPM	Maximum turns: 限位圈数:	40	Power cable: 电源线类别:	4Wires	Protection index: 防护等级:	IP44	Limit switch type: 行程功能:	机械 mechanical

Motor type: 电机型号:	SHAMAN 45S-20/15	Nominal voltage: 额定电压:	220-240V	Nominal frequency: 额定频率:	50/60Hz	Nominal current: 额定电流:	0.65A	Nominal consumption: 额定功率:	145W	Protection time: 热保护时间:	4Min	Radio frequency: 遥控频率:	/
		Nominal torque: 额定扭矩:	20NM	Nominal speed: 额定转速:	15RPM	Maximum turns: 限位圈数:	40	Power cable: 电源线类别:	4Wires	Protection index: 防护等级:	IP44	Limit switch type: 行程功能:	机械 mechanical

Motor type: 电机型号:	SHAMAN 45S-30/15	Nominal voltage: 额定电压:	220-240V	Nominal frequency: 额定频率:	50/60Hz	Nominal current: 额定电流:	0.75A	Nominal consumption: 额定功率:	175W	Protection time: 热保护时间:	4Min	Radio frequency: 遥控频率:	/
		Nominal torque: 额定扭矩:	30NM	Nominal speed: 额定转速:	15RPM	Maximum turns: 限位圈数:	40	Power cable: 电源线类别:	4Wires	Protection index: 防护等级:	IP44	Limit switch type: 行程功能:	机械 mechanical

Motor type: 电机型号:	SHAMAN 45S-40/15	Nominal voltage: 额定电压:	220-240V	Nominal frequency: 额定频率:	50/60Hz	Nominal current: 额定电流:	1.1A	Nominal consumption: 额定功率:	250W	Protection time: 热保护时间:	4Min	Radio frequency: 遥控频率:	/
		Nominal torque: 额定扭矩:	40NM	Nominal speed: 额定转速:	15RPM	Maximum turns: 限位圈数:	40	Power cable: 电源线类别:	4Wires	Protection index: 防护等级:	IP44	Limit switch type: 行程功能:	机械 mechanical

Motor type: 电机型号:	SHAMAN 45S-50/12	Nominal voltage: 额定电压:	220-240V	Nominal frequency: 额定频率:	50/60Hz	Nominal current: 额定电流:	1.1A	Nominal consumption: 额定功率:	250W	Protection time: 热保护时间:	4Min	Radio frequency: 遥控频率:	/
		Nominal torque: 额定扭矩:	50NM	Nominal speed: 额定转速:	12RPM	Maximum turns: 限位圈数:	40	Power cable: 电源线类别:	4Wires	Protection index: 防护等级:	IP44	Limit switch type: 行程功能:	机械 mechanical

Product parameter / 产品信息

Motor type: 电机型号:	SHAMAN 45R-10/15	Nominal voltage: 额定电压:	220-240V	Nominal frequency: 额定频率:	50/60Hz	Nominal current: 额定电流:	0.65A	Nominal consumption: 额定功率:	145W	Protection time: 热保护时间:	4Min	Radio frequency: 遥控频率:	433.92MHz
		Nominal torque: 额定扭矩:	10NM	Nominal speed: 额定转速:	15RPM	Maximum turns: 限位圈数:	40	Power cable: 电源线类别:	3Wires	Protection index: 防护等级:	IP44	Limit switch type: 行程功能:	机械 mechanical

Motor type: 电机型号:	SHAMAN 45R-20/15	Nominal voltage: 额定电压:	220-240V	Nominal frequency: 额定频率:	50/60Hz	Nominal current: 额定电流:	0.65A	Nominal consumption: 额定功率:	145W	Protection time: 热保护时间:	4Min	Radio frequency: 遥控频率:	433.92MHz
		Nominal torque: 额定扭矩:	20NM	Nominal speed: 额定转速:	15RPM	Maximum turns: 限位圈数:	40	Power cable: 电源线类别:	3Wires	Protection index: 防护等级:	IP44	Limit switch type: 行程功能:	机械 mechanical

Motor type: 电机型号:	SHAMAN 45R-30/15	Nominal voltage: 额定电压:	220-240V	Nominal frequency: 额定频率:	50/60Hz	Nominal current: 额定电流:	0.75A	Nominal consumption: 额定功率:	175W	Protection time: 热保护时间:	4Min	Radio frequency: 遥控频率:	433.92MHz
		Nominal torque: 额定扭矩:	30NM	Nominal speed: 额定转速:	15RPM	Maximum turns: 限位圈数:	40	Power cable: 电源线类型:	3Wires	Protection index: 防护等级:	IP44	Limit switch type: 行程功能:	机械 mechanical

Motor type: 电机型号:	SHAMAN 45R-40/15	Nominal voltage: 额定电压:	220-240V	Nominal frequency: 额定频率:	50/60Hz	Nominal current: 额定电流:	1.1A	Nominal consumption: 额定功率:	250W	Protection time: 热保护时间:	4Min	Radio frequency: 遥控频率:	433.92MHz
Nominal torque: 额定扭矩:	40NM	Nominal speed: 额定转速:	15RPM	Maximum turns: 限位圈数:	40	Power cable: 电源线类别:	3Wires	Protection index: 防护等级:	IP44	Limit switch type: 行程功能:	机械	mechanical	

Motor type: 电机型号:	SHAMAN 45R-50/12	Nominal voltage: 额定电压:	220-240V	Nominal frequency: 额定频率:	50/60Hz	Nominal current: 额定电流:	1.1A	Nominal consumption: 额定功率:	250W	Protection time: 热保护时间:	4Min	Radio frequency: 遥控频率:	433.92MHz
		Nominal torque: 额定扭矩:	50NM	Nominal speed: 额定转速:	12RPM	Maximum turns: 限位圈数:	40	Power cable: 电源线类别:	3Wires	Protection index: 防护等级:	IP44	Limit switch type: 行程功能:	机械 mechanical

Φ45交流管状电机AC tubular motor



S H A M A N 4 5 E

电子内置型 Electronic radio



- | | |
|------------------|-------------------------|
| 01 | 02 |
| AC 220-240V | Electronic limit |
| 03 | 04 |
| 电压 220-240V | 电子限位
行程 |
| 05 | |
| Obstacle rebound | Limit setting by remote |
| 遇阻反弹 | 遥控器设限位 |
| | Remote control |
| | 遥控控制 |

Product parameter / 产品信息



485 总线

Motor type: 电机型号: SHAMAN 45E-10/15	Nominal voltage: 额定电压: 220-240V	Nominal frequency: 额定频率: 50/60Hz	Nominal current: 额定电流: 0.65A	Nominal consumption: 额定功率: 145W	Protection time: 热保护时间: 4Min	Radio frequency: 遥控频率: 433.92MHz
	Nominal torque: 额定扭矩: 10NM	Nominal speed: 额定转速: 15RPM	Maximum turns: 限位圈数: /	Power cable: 电源线类别: 3Wires	Protection index: 防护等级: IP44	Limit switch type: 行程功能: 电子 electronic

Motor type: 电机型号: SHAMAN 45E-20/15	Nominal voltage: 额定电压: 220-240V	Nominal frequency: 额定频率: 50/60Hz	Nominal current: 额定电流: 0.65A	Nominal consumption: 额定功率: 145W	Protection time: 热保护时间: 4Min	Radio frequency: 遥控频率: 433.92MHz
	Nominal torque: 额定扭矩: 20NM	Nominal speed: 额定转速: 15RPM	Maximum turns: 限位圈数: /	Power cable: 电源线类别: 3Wires	Protection index: 防护等级: IP44	Limit switch type: 行程功能: 电子 electronic

Motor type: 电机型号: SHAMAN 45E-30/15	Nominal voltage: 额定电压: 220-240V	Nominal frequency: 额定频率: 50/60Hz	Nominal current: 额定电流: 0.75A	Nominal consumption: 额定功率: 175W	Protection time: 热保护时间: 4Min	Radio frequency: 遥控频率: 433.92MHz
	Nominal torque: 额定扭矩: 30NM	Nominal speed: 额定转速: 15RPM	Maximum turns: 限位圈数: /	Power cable: 电源线类别: 3Wires	Protection index: 防护等级: IP44	Limit switch type: 行程功能: 电子 electronic

Motor type: 电机型号: SHAMAN 45E-40/15	Nominal voltage: 额定电压: 220-240V	Nominal frequency: 额定频率: 50/60Hz	Nominal current: 额定电流: 1.1A	Nominal consumption: 额定功率: 250W	Protection time: 热保护时间: 4Min	Radio frequency: 遥控频率: 433.92MHz
	Nominal torque: 额定扭矩: 40NM	Nominal speed: 额定转速: 15RPM	Maximum turns: 限位圈数: /	Power cable: 电源线类别: 3Wires	Protection index: 防护等级: IP44	Limit switch type: 行程功能: 电子 electronic

Motor type: 电机型号: SHAMAN 45E-50/12	Nominal voltage: 额定电压: 220-240V	Nominal frequency: 额定频率: 50/60Hz	Nominal current: 额定电流: 1.1A	Nominal consumption: 额定功率: 250W	Protection time: 热保护时间: 4Min	Radio frequency: 遥控频率: 433.92MHz
	Nominal torque: 额定扭矩: 50NM	Nominal speed: 额定转速: 12RPM	Maximum turns: 限位圈数: /	Power cable: 电源线类别: 3Wires	Protection index: 防护等级: IP44	Limit switch type: 行程功能: 电子 electronic

Awning motor



智能阳蓬电机

F

Functions

功 能 特 点

无尽之窗阳篷专用电机系列，适合各类阳篷类型，实现罩壳式阳篷自动收紧功能，搭配Wi-Fi, zigbee, matter等不同智能控制协议，除标准遥控控制之外，还可实现手机app控制，语音音箱控制等.....

无尽之窗，助你随时随地，轻松智控。

The ADD Window awning motor Series is suitable for various types of sunshades, achieving automatic tightening function of the cover type sunshade. Working with different intelligent control protocols such as Wi Fi, zigbee, and matter...It can achieve mobile app control, voice speaker control...besides remote control. ADD Window let you achieve smart controls wherever you are ,whenever you want...



Φ45交流管状电机AC tubular motor

∞

S H A M A N 4 5 E

电子内置型 Electronic radio



Top

Bottom

顶部展示

底部展示

Functions

功 能 特 点

01

AC 220-240V

02

Electronic limit

电压 220-240V

电子限位 行程

03

Limit setting by remote

04

遥控器设限位

Remote control

05

Obstacle rebound

遇阻反弹



Product parameter / 产品信息



485 总线

Motor type: SHAMAN 45E-30/15	Nominal voltage: 220-240V	Nominal frequency: 50/60Hz	Nominal current: 0.75A	Nominal consumption: 175W	Protection time: 4Min	Radio frequency: 433.92MHz
	Nominal torque: 30NM	Nominal speed: 15RPM	Maximum turns: /	Power cable: 3Wires	Protection index: IP44	Limit switch type: 电子 electronic

Motor type: SHAMAN 45E-40/15	Nominal voltage: 220-240V	Nominal frequency: 50/60Hz	Nominal current: 1.1A	Nominal consumption: 250W	Protection time: 4Min	Radio frequency: 433.92MHz
	Nominal torque: 40NM	Nominal speed: 15RPM	Maximum turns: /	Power cable: 3Wires	Protection index: IP44	Limit switch type: 电子 electronic

Motor type: SHAMAN 45E-50/12	Nominal voltage: 220-240V	Nominal frequency: 50/60Hz	Nominal current: 1.1A	Nominal consumption: 250W	Protection time: 4Min	Radio frequency: 433.92MHz
	Nominal torque: 50NM	Nominal speed: 12RPM	Maximum turns: /	Power cable: 3Wires	Protection index: IP44	Limit switch type: 电子 electronic

CONTENT NO.5

Remote Controller



遥控器

HUNTER系列遥控器，功能多样，设计精巧，有单通道，双通道，LCD屏多通道遥控器。


The HUNTER series remote control are with diverse functions and exquisite exterior design. There are single channel, dual channel, and LCD screen multi-channel remote controls available.



猎人系列 Hunter series



H U N T E R 1 0 1

Wall-mounted
墙贴式Handheld
手持式Two channels magnetic
双通道磁吸Three channels magnetic
三通道磁吸Product name:
品名:

迷你式遥控 Mini Remote

Battery model:
电池型号:

CR2032

Product name:
产品型号:

HUNTER 101

Battery voltage:
电池电压:

3V

Radio frequency:
发射频率:

433.92MHz

Battery life:
电池寿命:

2年 2 Year

Radio distance:
控制距离:

50m

Battery capacity:
电池容量:

210MAh

Fixing design:
固定方式:

磁吸式 Magnetic

Product size:
产品尺寸:

66*33*10MM

Hunter101系列迷你式遥控，小巧便捷，手感舒适，可手持，可墙贴，巧思设计磁吸固定方式，轻轻一吸，秒变双通道。

The Hunter101 series mini remote control is compact and convenient, with a comfortable touch. It can be hand-held or wall mounted. The ingenious design of magnetic fixation method allows for getting dual channels by a gentle suction.

猎人系列 Hunter series



H U N T E R 2 0 1



Hunter201

Single channel
单通道

Hunter201 S

Double channels
双通道

Hunter201 SD

Double channels with timer
双通道定时

Hunter201 D

Sixteen channels
16通道

Hunter201 DD

Sixteen channels with timer
16通道定时Product name:
品名: 液晶款遥控 LCD RemoteBattery model:
电池型号: 7号 AAAProduct name:
产品型号: HUNTER 201Battery voltage:
电池电压: 1.5VRadio frequency:
发射频率: 433.92MHzBattery life:
电池寿命: 1年 1 YearRadio distance:
控制距离: 50mProduct size:
产品尺寸: 145*44*15.5MMFixing design:
固定方式: 磁吸式 Magnetic

CONTENT NO.6

Accessories



配件

产品参数 Product parameter



K 1 0 3

Paladin 105 / 205 / 112



Product parameter / 产品信息

Motor type: 电机型号:	K103	Type-C input: Type-C输入:	DC5V/2A	Micro input: MICRO输入:	DC5V/2A	Output USB1: 输出USB1:	5V/2A	Material: 材质:	ABS	size: 尺寸:	137*68*27MM
Battery capacity: 电池容量:	20000mAh	Power interface: 接口:	TITO 双输出双输入	Output USB2: 输出USB2:	5V/2A	Self power consumption: 自耗电:	10% in 6 months 半年小于10%				



Product parameter / 产品信息

Motor type: 电机型号:	Paladin105	Max.Power: 最大功率:	4.3W	Voltage at max.power: 最大功率点电压:	5.1V	Work Temp.: 环境温度:	-40-85°C	OCV: 开路电压:	7.3V	size: 尺寸:	620*80.6*15.4MM
SCC: 短路电流:	0.98A	Current at max.power: 最大功率点电流:	0.84A	Work humidity: 环境湿度:	0-90%RH	USB Cable length: 线长USB:	1.5M				

