

# **Φ35/45AC Mechanical tubular motor with radio**

## **User Manual**

Please read the user manual carefully before using the product

## Technical parameter


### Remote hunter101:

- Battery voltage: 3V
- Radio frequency: 433.92MHz
- Battery capacity: 210MAh
- Product size: 66\*33\*10MM

### MOTOR:

- Input voltage: AC110-220V(50/60Hz)
- Loading power: <400W
- One receiver can be compatible with 15 emitters at most

## Wire connection

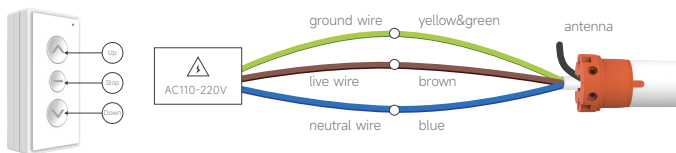

## Motor-remote operation

### Code pairing between motor and remote



Power on the motor



Second, press the STOP button on the remote, the motor vibrates once, It means code pairing is successful

### Remote copy code



Press the UP and DOWN of remote at the same time until motor vibrates once



Press STOP 8 times



Press DOWN of A remote once the motor vibrates once which means the motor enters in code copy mode



Next, press the STOP button of new remote B the motor vibrates once Now remote B can also control the motor

## Release the control of current remote



Press UP and DOWN at the same time  
the motor vibrates once



Press STOP 7 times



Then press DOWN  
the motor vibrates once  
release the current remote control successfully

## Release the control of all remote controls



Press UP and DOWN at the same time  
the motor vibrates once



Press STOP 7 times



Then press UP  
the motor vibrates once  
release all remote controls successfully

## Factory reset



Press the UP and DOWN at the  
same time until the motor vibrates once



Then long press the STOP until motor vibrates once  
after releasing the key, the motor will vibrate twice more  
Factory reset is finished

## DOS and DON'TS

1. Fixation and maintenance for the motor should be implemented by the authorized person;
2. After opening the package, check the motor to make sure whether it appears deformation, damage and the accessory is completely attached;
3. The electrical outlet must include the grounding wire connection terminal and it should be connected with the ground fully;
4. The motor should be done a test on the condition of no load and insure that it does not appear abnormal noise.

## Customer service

- 1.We promise that customer have 5 years guarantee due to the quality problem;
- 2.If due to improper installation, not according to the manual installation, caused by the fault or damage, the company will provide paid maintenance services;
- 3.Due to voltage resistance or abnormal voltage, abnormal temperature, water, fire, other force majeure caused by the fault or damage, the company provides paid maintenance services;
- 4.The company will not provide maintenance service for the failure or damage caused by artificial dismantling or unauthorized alteration of the product.

## Non-warranty clause

- 1.Unauthorized maintenance,misuse, collision, negligence, abuse, infusion, accident, modification, incorrect use of parts other than the product, or tear, alter label stickers, security marks;
- 2.The period of validity of warranty has exceeded;
- 3.Damage caused by force majeure;
- 4.Other than the product itself,technology,manufacturing,quality and other problems caused by damage or failure.

